



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

### Complementary

Electrical connection	Straight female connector 7/8"16 UN, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	6.56 ft (2 m)
Cable outer diameter	0.20 in (5 mm)
Cable composition	3 x 0.5 mm <sup>2</sup>
Wire insulation material	PUR
[Ue] rated operational voltage	250 V AC
[In] rated current	6 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.40 lb(US) (0.18 kg)

### Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-31...194 °F (-35...90 °C) static 23...194 °F (-5...90 °C) flexing
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3.03 oz (85.9 g)
Package 1 Height	1.57 in (4 cm)
Package 1 width	7.87 in (20 cm)
Package 1 Length	9.45 in (24 cm)
Unit Type of Package 2	BAG
Number of Units in Package 2	1
Package 2 Weight	3.03 oz (86 g)
Package 2 Height	1.57 in (4 cm)
Package 2 width	7.87 in (20 cm)
Package 2 Length	9.45 in (24 cm)
Unit Type of Package 3	S02
Number of Units in Package 3	40
Package 3 Weight	8.18 lb(US) (3.712 kg)
Package 3 Height	5.91 in (15 cm)
Package 3 width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

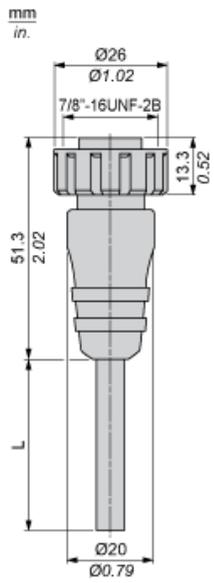


L : Length of cable

---

Connections and Schemes

---

Connector



- BU : Blue
- BN : Brown
- BK : Black