

ORDERING INFORMATION

Order code: 51177
 Description: F32T8/BL/RS/G13/STD
 UPC: 69549011779
 Case quantity: 25




Nominal length : 48 in. (915 mm) Dia. : 1 in. (26 mm)


PERFORMANCE DATA

Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 32
 Colour temperature (K): N/A
 CRI: N/A
 Rated life on IS¹ ballast:
 Based on a 3 hour start 8 000
 Based on a 12 hour start 10 000
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 10 000
 Based on a 12 hour start 12 000
 Initial lumens (lm): N/A
 Mean lumens (lm): N/A
 Nominal efficiency (lm/W): N/A
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

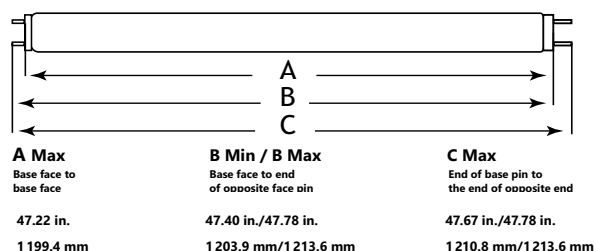

SPECTRAL DISTRIBUTION

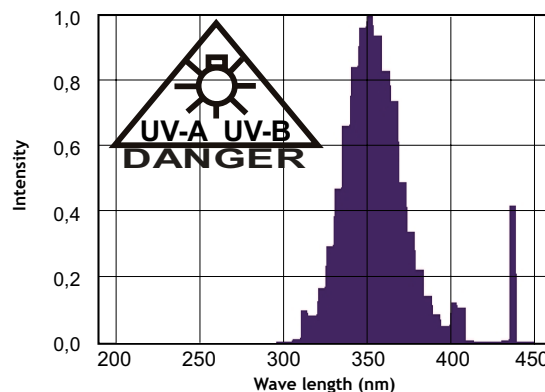

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Coloured ballast.



OUTDOOR



INDOOR



2 YEAR WARRANTY



TCLP COMPLIANT



RECYCLABLE



ENERGY SAVING



ONE YEAR WARRANTY