

# Ray RL-RAY-60-BK

Recessed Light

Product Finishes: ■ ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 1.5

**Volt Amps:** 2.5

**Lumens:** 100

**Color Temp:** 2700k

**IP Rating:** 67

**CRI:** 93

**Light Source:** Integrated

**Material:** Polycarbonate

**Ring Material:** Anodized aluminum

**Cable Length:** 36"

**Lux (lx):** 11

**Candelas (cd):** 542

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive

**Dimmable:** No

**Color-Changing:** No



**Drive-Over Rated:** Yes

## Product Uses:

Walls, Fences

## Accessories:

Fang

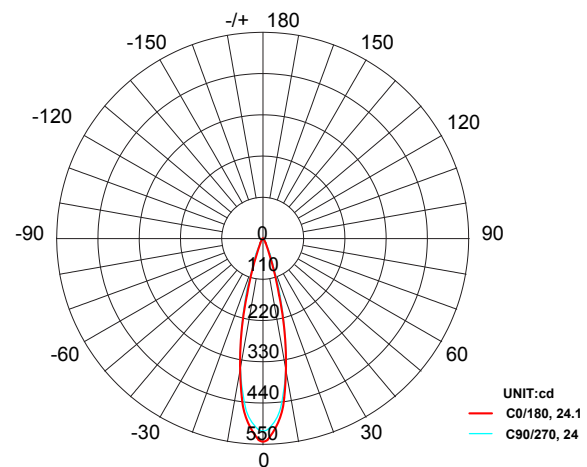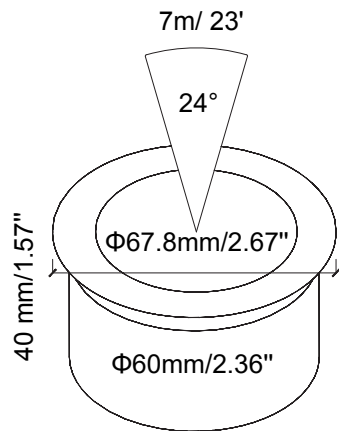

Max. Luminous intensity : 542 cd

AVERAGE BEAM ANGLE (50%): 24 DEG

| DISTANCE (FT) | CENTER BEAM (FC)<br>Eavg/Emax | ILLUMINANCE - CONE OF LIGHT | BEAM DIAMETER (FT) |
|---------------|-------------------------------|-----------------------------|--------------------|
| 3.25          | 32.84/49.57                   |                             | 1.37               |
| 6.25          | 8.21/13.39                    |                             | 2.73               |
| 10            | 3.74/5.65                     |                             | 4.17               |
| 13            | 2.05/3.10                     |                             | 5.43               |
| 16.5          | 1.34/2.01                     |                             | 6.93               |
| 19.5          | 0.91/1.39                     |                             | 8.16               |
| 23            | 0.68/1.02                     |                             | 9.63               |



support@boldpros.com | 1-833-472-9960

boldpros.com