

Electronic Temperature Control

Universal

16E09-101

- Refrigeration or Heating Applications
- Alarm Output with Selectable Delay
Prevents false alarms
- No Common Wire Required*
*Saves 30-60 minutes installation time
when upgrading a mechanical control*

*Electrical load must be greater than 2.5 amps and uninterrupted



Save
30-60 Minutes
Installation
Time

Multiple Input Voltage
(24/120/208/240 Volts AC)



Superior Temperature Control and Accuracy for Both Refrigeration and Heating Applications...and It's Universal, Too!

- 16E09-101 replaces most mechanical and electronic single stage controls using an SPDT output relay
- Offers the widest multiple voltage operating range: 24/120/208/240 VAC for truly universal replacement
- Does not require a common wire when electrical load is greater than 2.5 amps — saving 30 to 60 minutes installation time when upgrading a mechanical control
- Offers a wider than industry standard setpoint temperature range (-40°F to 220°F) and adjustable differential settings
- Reduces inventory — 16E09-101 replaces most competitive mechanical and electronic refrigeration controls

Features

Multiple Input Voltages
(24/120/208/240 Volts)

No Common Wire Required (Electrical load
must be greater than 2.5 amps and
uninterrupted)

Electronic Temperature Accuracy

Alarm Output (with selectable delay – up to
99 minutes)

Adjustable Anti-Short Cycle Delay

Setpoint Locking Function

Applications

Convenience Store Freezer Control

Reach-In Coolers

Supermarket Display Cases (meat/produce)

Boiler Control

Restaurant/Convenience Store

Walk-In Coolers

Condenser Fan Cycling

Pump Control

Space and Return-Air Temperature

Includes

NTC Sensor with 7.5-Ft. Leads

Cross-Reference Replacement Guide

16E09-101

Universal Replacement Electronic Refrigeration or Heating Control

- Alarm Output with Selectable Delay
Prevents false alarms
- No Common Wire Required (Electrical load must be greater than 2.5 amps and uninterrupted)
Saves 30-60 minutes installation time when upgrading a mechanical control

Specifications

Setpoint Range:
-40° to 220°F (-40° to 104°C)

Differential Range: 1° to 30°F (1° to 30°C)

Supply Voltage:
24/120/208/240 VAC, 60Hz

Sensor: Negative Temperature Coefficient
with 7.5-Ft. Leads (Maximum length for
remote temperature sensing – 400 feet)

Control Enclosure Ambient Temperatures
Operating: -29° to 140°F (-34° to 60°C)
Storage: -40° to 185°F (-40° to 85°C)

Control Material

Cover and Case: NEMA 1 high-impact plastic
Thermoplastic: Non-flammable UL94V0

Switch Action: SPDT

Ambient Humidity: 0 to 95% RH, non-condensing

Dimensions

6 3/4" L x 3" W x 2 9/16" D

16E09-101 Optional Accessories/Service Items

Immersion Well: F89-0286
Replacement 7.5-Ft. NTC Remote Sensor: F136-0114
Well Heat Transfer Compound: F145-0650

For Additional Information

Visit www.white-rodders.com


Load Relay Electrical Ratings N.C. and Load Contacts (Maximum Load Current)

Applied voltage:	120 VAC	208 VAC	240 VAC
Full load amps:	16 Amps	9.2 Amps	8 Amps
Locked rotor amps:	96 Amps	55.2 Amps	48 Amps
Non-inductive amps:	16 Amps	16 Amps	16 Amps
Horsepower:	1 hp	1 hp	1 hp
24 VAC:	100 VA, 30 VAC Max. (Class 2)		
Pilot duty:	125 VA, 24 to 240 VAC		
Minimum load:	1 Amp @ 24 VAC		

Alarm Relay Electrical Ratings

N.O. contacts:	1 Amp (5 to 24 volts AC or DC)
----------------	--------------------------------

Typical Wiring

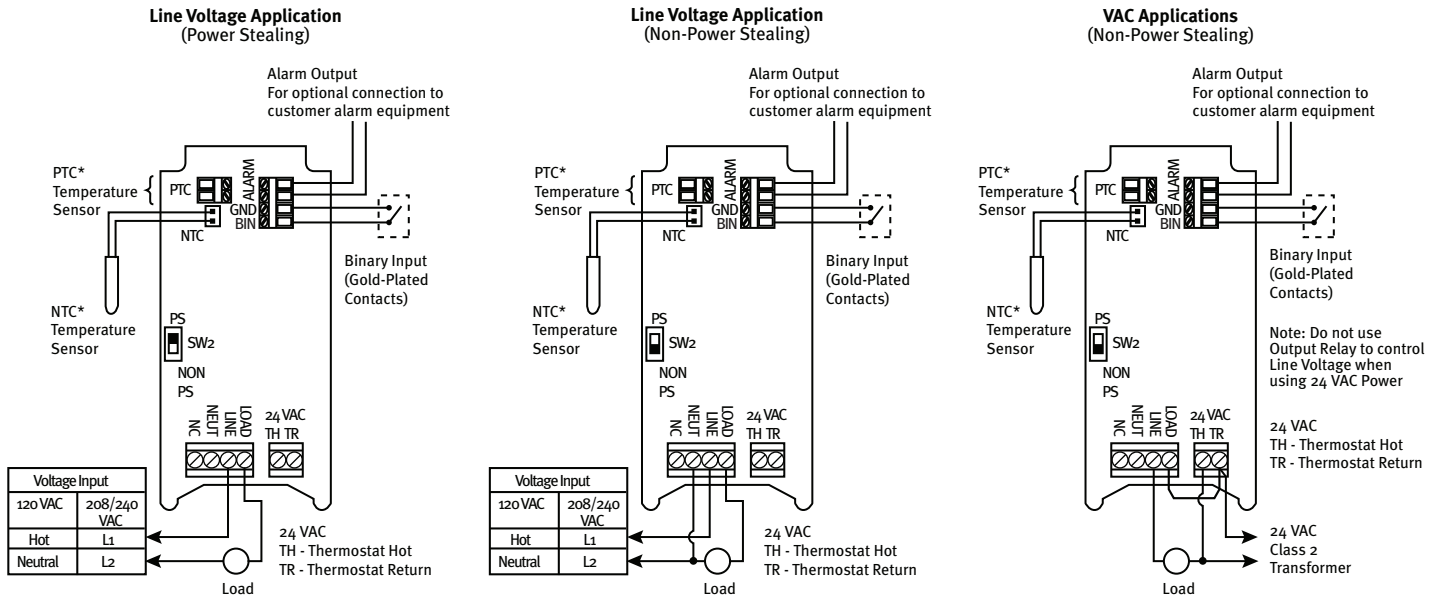

*Note: Alarm connection contacts close when sensor fails or temperature range is exceeded.

NTC - Negative Temperature Coefficient

PTC - Positive Temperature Coefficient

Note: Only one Sensor (PTC or NTC) may be connected. Sensor must meet specific temperature vs. resistance specifications.

16E09-101* Replaces the Following Models

Danfoss UT72	T6054A1054	T675A1524	T678C1005	Ranco ETC Commercial Temperature Controls 060-100† 060-101† 060-109† 060-200† ETC-111000 ETC-112000	Johnson Controls A19ABA-40C† A19ABC-24C† A19BAB-3C† A19BAC-1C† A19BAF-1C A19BBC-2C† A319ABC-12-01	A319ABC-24-01 A320ABC-1C A419ABC-1C	White-Rodgers 1687-9† 1609-33† 1609-100† 1609-101† 1609-102† 1609-103† 1609-104† 1609-105†	201-8† 201-20† 230-22† 241-2† 2A37-1†
Honeywell T4031A1073 T4031C1004 T4031C1012 T6031A1029 T6054A1005	T675A1045 T675A1136 T675A1425 T675A1441 T675A1458 T675A1508 T675A1516	T675A1540 T675A1565 T675A1706 T675A1722 T675A1771 T675A1854 T675F1032	T7079A1004 T7079A1012 T7079A1046 T7079A1053					

*16E09-101 is not rated as a limit control

†16E09-101 is a replacement on non-inductive applications up to 16 amps