FJXMPMPAD



OM4 MPO (Unpinned) to MPO (Unpinned), InstaPATCH® 360 Preterminated Trunk Cable, 12-Fiber, Low Smoke Zero Halogen

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly
Product Brand SYSTIMAX InstaPATCH® 360

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration | Not available in the United States or Canada

General Specifications

Color, boot ABlackColor, boot BBlackColor, connector AAquaColor, connector BAquaConstruction TypeStranded

Fibers per Subunit, quantity 12

Furcation Color Aqua

Interface, Connector A MPO-12/UPC

Interface Feature, connector A Female

Interface, Connector B MPO-12/UPC

Interface Feature, connector BFemaleJacket ColorAqua

Polarity Method B (LL)

Total Fibers, quantity 12



FJXMPMPAD


Dimensions

Breakout Length 33 in

Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 - 999

Ordering Tree

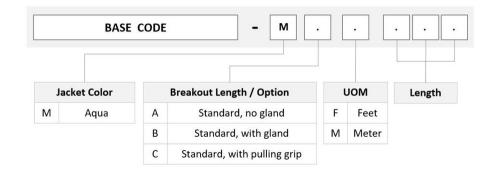

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser | Indoor

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
ATTAN ATTANA	



FJXMPMPAD

Included Products

760067470 – LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 12

N-012-MP-5K-F12AQ/D fib

860647054 – MPO12, LOW LOSS, FEMALE, OM3/4, AQUA, 3mm

