

LazrSPEED® Low Smoke Zero Halogen Riser Distribution Cable, 72 fiber multi-unit with 12 fiber subunits

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable


General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Fiber Type, quantity	72
Fibers per Subunit, quantity	12
Jacket Color	Aqua
Subunit Type	Gel-free
Subunit, quantity	6
Total Fiber Count	72

Dimensions

Buffer Tube/Subunit Diameter	6.07 mm   0.239 in
Diameter Over Jacket	20.01 mm   0.788 in

Representative Image

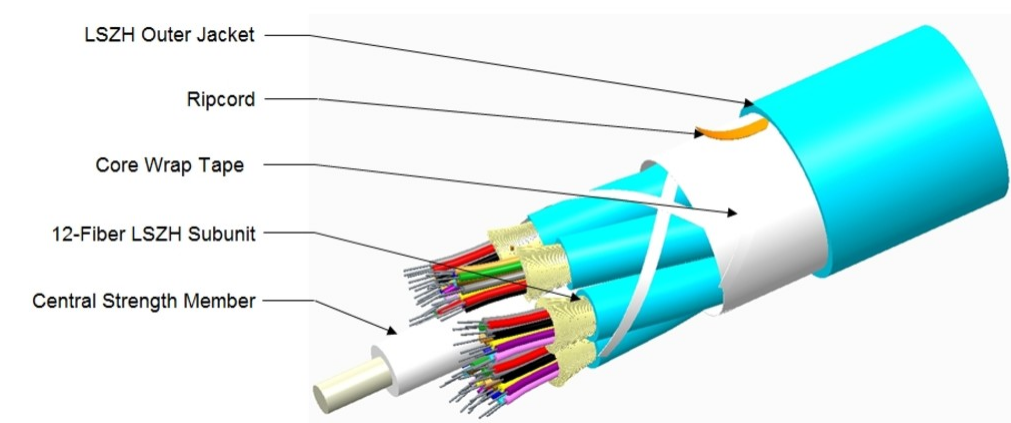

Mechanical Specifications

Minimum Bend Radius, loaded	300 mm   11.811 in
Minimum Bend Radius, unloaded	200 mm   7.874 in
Tensile Load, long term, maximum	400 N   89.924 lbf
Tensile Load, short term, maximum	1335 N   300.12 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	5.88 N-m   52.042 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	113 m   370.735 ft

Optical Specifications

Fiber Type	OM4, LazrSPEED® 550   OM4, LazrSPEED® 550
------------	---

Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)

# 760074112 | N-072-DS-5K-FMUAQ/C

<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Cca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1b
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d1
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)   Riser
<b>Flame Test Listing</b>	NEC OFNR-ST1 (ETL) and c(ETL)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Test Specifications

<b>Heat Age</b>	-20 °C to +85 °C (-4 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-10 °C to +60 °C (+14 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	360 kg/km   241.909 lb/kft
---------------------	----------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant



## Included Products

CS-5K-TB	– LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber
----------	---

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable