


## Wiremold 5500 Device Inline Bracket Fitting

Part No. 5550WH

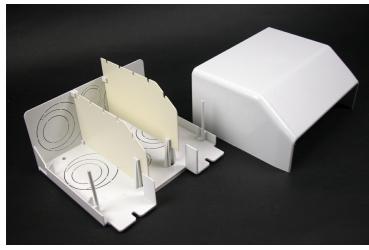

For mounting up to three power and communication devices with the 5500 Series Raceway. Utilizes 5507 Series Faceplates, Wiremold Open System communication modules, Ortronics TracJack and Series II inserts, and Pass and Seymour Activate Series inserts. For faceplate options, see 5507 Series Faceplates. NOTE: CM-EPLA End Plates are required when using Wiremold communication modules and Pass and Seymour Activate inserts. S2-EPL End Plates are required when using Ortronics Series II inserts. To mount TracJack inserts, use 5507-4TJ or 5507-6TJ Faceplates.

## Features & Benefits

For mounting up to three power and communication devices with the 5500 For faceplate options, see 5507 Series Faceplates. Series Raceway. Utilizes 5507 Series Faceplates, Wiremold Open System NOTE: CM-EPLA End Plates are required when communication modules, Ortronics TracJack and Series II inserts, and Pass and Seymour Activate Series inserts.

using Wiremold communication modules and Pass and Seymour Activate inserts.

S2-EPL End Plates are required when using Ortronics Series II inserts. To mount TracJack inserts, use 5507-4TJ or 5507-6TJ Faceplates.

## Specifications

## General Info

Wiremold 786776059182 5500 Series	Color Country Of Origin	White United States
	Country Of Origin	United States
5500 Series		
	Installation Location	On Wall
Commercial	Standard	cULus Listed Raceway: File E90378 Guide RJTX. Complies with flammability requirements of UL-5A. Fittings: File E90377 Guide RJYT. Meets Article 388 of NEC. UL Listed for up to 600V. Meets Section 12-1600 of CEC.
1-Year from Installation or 2-Years from Day of Sale	Туре	Fitting
	1-Year from Installation or 2-Years	1-Year from Installation or 2-Years

**Dimensions** 

Product Weight US	0.35 lb	Product Depth US	0.437 in	
Product Height US	6.625 in	Product Length US	6.0 in	
Listing Agencies / 3rd Party Agencies				
cULus ListingNumber	E90377	cULus Listed	Yes	
Trade Programs				
USMCA	Yes			
Additional Information				
RoHS Compliant	Yes			
Technical Information				
Is Pre-Wired	No	Indoor/Outdoor	Indoor	
Voltage	600.0 V			