



B217-20 SNAP CLOSURE STRIP FOR ALL 1⁵/₈" (41.3) WIDE CHANNELS

- Refer to Raceway Fill Chart
Pg. 214-215
- Material: 20 Gauge (.9)
- Standard finishes: GRN, GALV, YZN
- Standard length: 120" (3.05m)
- Wt./CFT 36 Lbs. (16.3 kg)

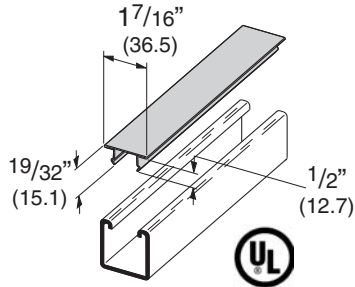


B217P PLASTIC SNAP CLOSURE STRIP FOR ALL 1⁵/₈" (41.3) WIDE CHANNELS

- Refer to Raceway Fill Chart
Pg. 214-215
- Standard finishes: Green (GRN) or
Gray (GRY) Plastic
- Standard length: 120" (3.05m)
- Wt./CFT 9.2 Lbs. (4.2 kg)

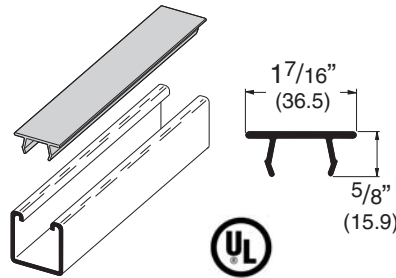


B217-24 SNAP CLOSURE STRIP FOR ALL 1⁵/₈" (41.3) WIDE CHANNELS

- Refer to Raceway Fill Chart
Pg. 214-215
- For use with 7 or fewer conductors no
larger than #12 AWG
- Material: 24 Gauge (.6)
- Standard finishes: GRN, GALV, YZN
- Standard length: 120" (3.05m)
- Wt./CFT 28 Lbs. (12.7 kg)

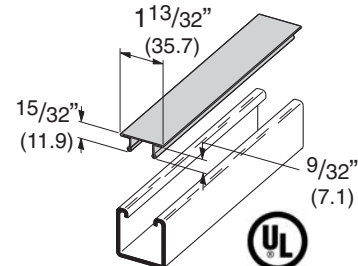


B516 SNAP-IN OUTLET BOX

- Provided with #10-32 tapped hole for grounding strap
- Duplex cover plate included
- Receptacle not furnished
- Requires ground wire installation for
use with UL listed channel raceway system
- Standard finish: GALV
- Wt./C 72 Lbs. (32.6 kg)

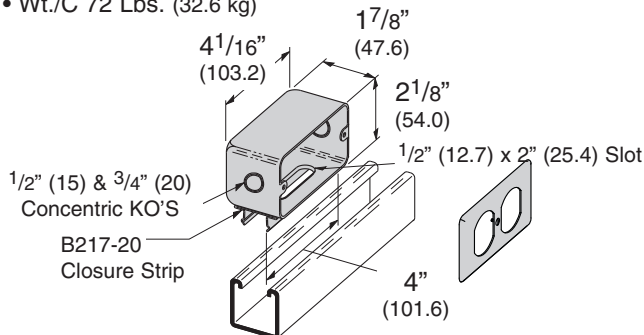


B516S OUTLET BOX

- Duplex cover plate included
- Receptacle not furnished
- Includes:
2 pcs. 1/4"-20 Flat Head Machine Screws
2 pcs. N224WO Channel Nuts
- Standard finish: ZN
- Wt./C 98 Lbs. (44.4 kg)

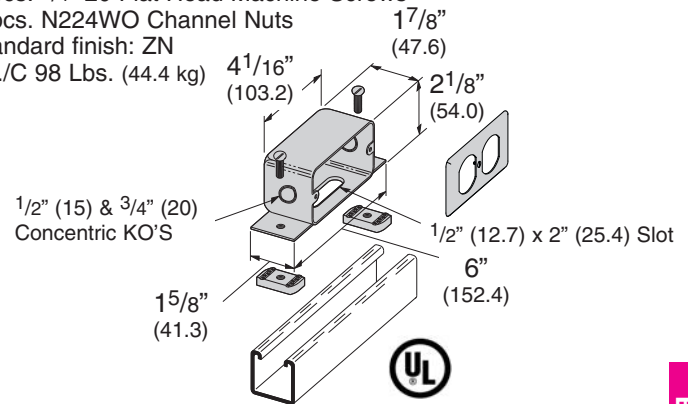


B203 THRU B206 B220 THRU B223 X TYPE END CAPS

- Material: 12 Gauge (2.6)
- Standard finishes: ZN, GRN, HDG, SS4



B283 THRU B286 END CAPS

- Material: 12 Gauge (2.6)
- Standard finishes: ZN, GRN



Part No.	Use With	A	Wt./C	
			Lbs.	kg
B203	B42	1.015" (25.8)	6	(2.7)
B204	B54	.827" (21.0)	5	(2.2)
B205	B22	1.640" (41.6)	10	(4.5)
B206	B32	1.390" (35.3)	8	(3.6)
B220	B52	.827" (21.0)	4	(1.8)
B221	B12	2.452" (62.3)	15	(6.8)
B222	B11	3.265" (82.9)	20	(9.1)
B223	B24	1.640" (41.6)	10	(4.5)

Part No.	Use With	A	B	Wt./C	
				Lbs.	kg
B283	B52	1 19/32" (40.5)	25/32" (19.8)	6	(2.7)
B284	B54 & B56	1 19/32" (40.5)	25/32" (19.8)	6	(2.7)
B285	B22	1 19/32" (40.5)	1 19/32" (40.5)	13	(5.9)
B286	B24 & B26	1 19/32" (40.5)	1 19/32" (40.5)	14	(6.3)

Reference page 162 for general fitting and standard finish specifications. U.L. Wire Fill Chart on pages 230 - 231.