




SURECRIMP® CLWS 1 HOLE LONG W/SIGHT

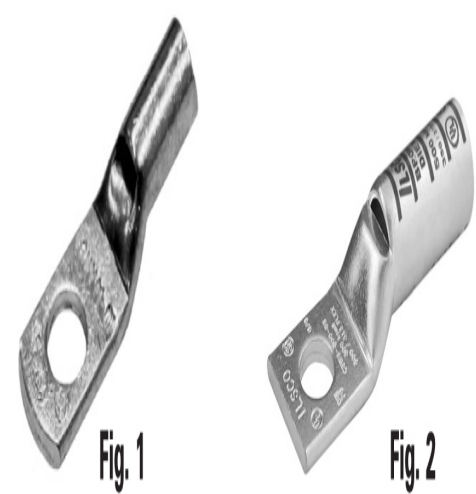

- Manufactured from high strength seamless copper tubing.
- Electro-Tin plated.
- Long barrel length with chamfered entry.
- Sight hole and chamfered barrel for visual inspection of proper cable insertion.
- Color Coded.
- UL 486A/B 90° C Listed and CSA Certified.
- 500 kcmil - 10 AWG, #10 - # 2 SOL UL467 Listed for grounding and bonding applications.
- Direct burial 500 kcmil - 10.
- Meets NEBS Level 3 requirements.
- If proper high voltage spacing and insulation techniques are used, may be used for high voltage applications up to 35KV.
- Expanded wire size with ILSCO dieless tools and Burndy Y644M dieless tool.
- For Copper Conductor only.
- Strand configurations:
- Copper - Class B concentric, Class B compressed, Class C concentric.
- IlSCO connectors are UL Listed and CSA Certified with ILSCO or other Manufacturers' tools.
- Refer to Tool and Die Charts under reference tab.
- UL File E6207.
- For Bent Tangs change the 4th letter to a B and add -4 for 45 deg. or -9 for 90 deg.

Item ID	Figure Number	Conductor Size	Alternate Conductor	Expanded	Bolt/Stud Size	Mounting Hole	Tang Length	Tang Width	Barrel Length	Strip Length	Overall Length	Color Code	Die Index Number	Die Catalog	Outside Diameter	Inside Diameter	Standard Package	NAED/U PC
CLWS-10-14	1	#10 SOL/STR		10-14 STR,	1/4	0.2310	0.5300	0.4200	0.5300	0.5925	1.230				0.2370	0.1490	50	0783669 691702
CLWS-8-10	2	#8 AWG	#8 FLEX, 8 SOL		#10	0.2190	0.5620	0.3740	0.8120	0.8740	1.5690	RED	I-21	ILD-21	0.2720	0.1790	50	0783669 627558



SURECRIMP® CLWS 1 HOLE LONG W/SIGHT

Item ID	Figure Number	Conductor Size	Alternate Conductor	Expanded	Bolt/Stud Size	Mounting Hole	Tang Length	Tang Width	Barrel Length	Strip Length	Overall Length	Color Code	Die Index Number	Die Catalog	Outside Diameter	Inside Diameter	Standard Package	NAED/U PC
CLWS-8-14	2	#8 AWG	#8 FLEX, 8 SOL		1/4	0.2810	0.6800	0.3740	0.8120	0.8740	1.6870	RED	I-21	ILD-21	0.2720	0.1790	50	0783669 627596
CLWS-8-516	2	#8 AWG	#8 FLEX, 8 SOL		5/16	0.3430	0.8750	0.3740	0.8120	0.8740	1.8820	RED	I-21	ILD-21	0.2720	0.1790	50	0783669 627633
CLWS-8-38	2	#8 AWG	#8 FLEX, 8 SOL		3/8	0.4060	0.8750	0.3740	0.8120	0.8740	1.8820	RED	I-21	ILD-21	0.2720	0.1790	50	0783669 627671
CLWS-6-10	2	#6 AWG	#6 FLEX, 6 SOL		#10	0.2190	0.5620	0.4400	1.1250	1.1870	1.8820	BLUE	I-24	ILD-24	0.3120	0.2250	50	0783669 628913
CLWS-6-14	2	#6 AWG	#6 FLEX, 6 SOL		1/4	0.2810	0.6800	0.4400	1.1250	1.1870	2.0000	BLUE	I-24	ILD-24	0.3120	0.2250	50	0783669 628951
CLWS-6-516	2	#6 AWG	#6 FLEX, 6 SOL		5/16	0.3430	0.8750	0.5300	1.1250	1.1870	2.1950	BLUE	I-24	ILD-24	0.3120	0.2250	50	0783669 628999
CLWS-6-38	2	#6 AWG	#6 FLEX, 6 SOL		3/8	0.4060	0.8750	0.5980	1.1250	1.1870	2.1950	BLUE	I-24	ILD-24	0.3120	0.2250	50	0783669 629033
CLWS-6-12	2	#6 AWG	#6 FLEX, 6 SOL		1/2	0.5620	1.2500	0.7550	1.1250	1.1870	2.5700	BLUE	I-24	ILD-24	0.3120	0.2250	50	0783669 629071
CLWS-4-10	2	#4 AWG	#4 SOL	4-6 AWG	#10	0.2190	0.5620	0.4860	1.1250	1.1870	1.9210	GRAY	I-29	ILD-29	0.3430	0.2500	50	0783669 630275
CLWS-4-14	2	#4 AWG	#4 SOL	4-6 AWG	1/4	0.2810	0.6800	0.4860	1.1250	1.1870	2.0390	GRAY	I-29	ILD-29	0.3430	0.2500	50	0783669 630312
CLWS-4-516	2	#4 AWG	#4 SOL	4-6 AWG	5/16	0.3430	0.8750	0.4860	1.1250	1.1870	2.2340	GRAY	I-29	ILD-29	0.3430	0.2500	50	0783669 630350
CLWS-4-38	2	#4 AWG	#4 SOL	4-6 AWG	3/8	0.4060	0.8750	0.4860	1.1250	1.1870	2.2340	GRAY	I-29	ILD-29	0.3430	0.2500	50	0783669 630398
CLWS-4-12	2	#4 AWG	#4 SOL	4-6 AWG	1/2	0.5620	1.2500	0.4860	1.1250	1.1870	2.6090	GRAY	I-29	ILD-29	0.3430	0.2500	50	0783669 630435
CLWS-3-10	2	#3 AWG	#4 FLEX	3-6 AWG	#10	0.2190	0.5620	0.5320	1.1250	1.1870	1.9420	WHITE	I-29	ILD-29	0.3750	0.2750	25	0783669 631630
CLWS-3-14	2	#3 AWG	#4 FLEX	3-6 AWG	1/4	0.2810	0.6800	0.5320	1.1250	1.1870	2.0600	WHITE	I-29	ILD-29	0.3750	0.2750	25	0783669 631678
CLWS-3-516	2	#3 AWG	#4 FLEX	3-6 AWG	5/16	0.3430	0.8750	0.5320	1.1250	1.1870	2.2550	WHITE	I-29	ILD-29	0.3750	0.2750	25	0783669 631715
CLWS-3-38	2	#3 AWG	#4 FLEX	3-6 AWG	3/8	0.4060	0.8750	0.5320	1.1250	1.1870	2.2550	WHITE	I-29	ILD-29	0.3750	0.2750	25	0783669 631753
CLWS-3-12	2	#3 AWG	#4 FLEX	3-6 AWG	1/2	0.5620	1.2500	0.5320	1.1250	1.1870	2.6300	WHITE	I-29	ILD-29	0.3750	0.2750	25	0783669 631791
CLWS-2-10	2	#2 AWG	#2 SOL	2-6 AWG	#10	0.2190	0.5620	0.5990	1.1250	1.1870	1.9730	BROWN	I-33	ILD-33	0.4210	0.3120	25	0783669 632958
CLWS-2-14	2	#2 AWG	#2 SOL	2-6 AWG	1/4	0.2810	0.6800	0.5990	1.1250	1.1870	2.0910	BROWN	I-33	ILD-33	0.4210	0.3120	25	0783669 632996
CLWS-2-516	2	#2 AWG	#2 SOL	2-6 AWG	5/16	0.3430	0.8750	0.5990	1.1250	1.1870	2.2860	BROWN	I-33	ILD-33	0.4210	0.3120	25	0783669 633030
CLWS-2-38	2	#2 AWG	#2 SOL	2-6 AWG	3/8	0.4060	0.8750	0.5990	1.1250	1.1870	2.2860	BROWN	I-33	ILD-33	0.4210	0.3120	25	0783669 633078



SURECRIMP® CLWS 1 HOLE LONG W/SIGHT

Item ID	Figure Number	Conductor Size	Alternate Conductor	Expanded	Bolt/Stud Size	Mounting Hole	Tang Length	Tang Width	Barrel Length	Strip Length	Overall Length	Color Code	Die Index Number	Die Catalog	Outside Diameter	Inside Diameter	Standard Package	NAED/U PC
CLWS-2-12	2	#2 AWG	#2 SOL	2-6 AWG	1/2	0.5620	1.2500	0.5990	1.1250	1.1870	2.6610	BROWN	I-33	ILD-33	0.4210	0.3120	25	0783669 633115
CLWS-1-10	2	#1 AWG	#2 FLEX	1-6 AWG	#10	0.2190	0.5620	0.6730	1.3750	1.4370	2.2670	GREEN	I-37	ILD-37	0.4680	0.3590	10	0783669 634273
CLWS-1-14	2	#1 AWG	#2 FLEX	1-6 AWG	1/4	0.2810	0.8750	0.6730	1.3750	1.4370	2.5800	GREEN	I-37	ILD-37	0.4680	0.3590	10	0783669 634310
CLWS-1-516	2	#1 AWG	#2 FLEX	1-6 AWG	5/16	0.3430	0.8750	0.6730	1.3750	1.4370	2.5800	GREEN	I-37	ILD-37	0.4680	0.3590	10	0783669 634358
CLWS-1-38	2	#1 AWG	#2 FLEX	1-6 AWG	3/8	0.4060	0.8750	0.6730	1.3750	1.4370	2.5800	GREEN	I-37	ILD-37	0.4680	0.3590	10	0783669 634396
CLWS-1-12	2	#1 AWG	#2 FLEX	1-6 AWG	1/2	0.5620	1.2500	0.6730	1.3750	1.4370	2.9550	GREEN	I-37	ILD-37	0.4680	0.3590	10	0783669 634433
CLWS-1/0-10	2	1/0 AWG	#1 FLEX	1/0-6 AWG	#10	0.2190	0.5620	0.7380	1.5000	1.5620	2.4180	PINK	I-42	ILD-42	0.5150	0.3900	10	0783669 635591
CLWS-1/0-14	2	1/0 AWG	#1 FLEX	1/0-6 AWG	1/4	0.2810	0.8750	0.7380	1.5000	1.5620	2.7310	PINK	I-42	ILD-42	0.5150	0.3900	10	0783669 635638
CLWS-1/0-516	2	1/0 AWG	#1 FLEX	1/0-6 AWG	5/16	0.3430	0.8750	0.7380	1.5000	1.5620	2.7310	PINK	I-42	ILD-42	0.5150	0.3900	10	0783669 635676
CLWS-1/0-38	2	1/0 AWG	#1 FLEX	1/0-6 AWG	3/8	0.4060	0.8750	0.7380	1.5000	1.5620	2.7310	PINK	I-42	ILD-42	0.5150	0.3900	10	0783669 635713
CLWS-1/0-12	2	1/0 AWG	#1 FLEX	1/0-6 AWG	1/2	0.5620	1.2500	0.7380	1.5000	1.5620	3.1060	PINK	I-42	ILD-42	0.5150	0.3900	10	0783669 635751
CLWS-2/0-10	2	2/0 AWG	1/0 FLEX	2/0-4 AWG	#10	0.2190	0.5620	0.8110	1.5000	1.5620	2.4580	BLACK	I-45	ILD-45	0.5620	0.4370	10	0783669 636918
CLWS-2/0-14	2	2/0 AWG	1/0 FLEX	2/0-4 AWG	1/4	0.2810	0.8750	0.8110	1.5000	1.5620	2.7710	BLACK	I-45	ILD-45	0.5620	0.4370	10	0783669 636956
CLWS-2/0-516	2	2/0 AWG	1/0 FLEX	2/0-4 AWG	5/16	0.3430	0.8750	0.8110	1.5000	1.5620	2.7710	BLACK	I-45	ILD-45	0.5620	0.4370	10	0783669 636994
CLWS-2/0-38	2	2/0 AWG	1/0 FLEX	2/0-4 AWG	3/8	0.4060	0.8750	0.8110	1.5000	1.5620	2.7710	BLACK	I-45	ILD-45	0.5620	0.4370	10	0783669 637038
CLWS-2/0-12	2	2/0 AWG	1/0 FLEX	2/0-4 AWG	1/2	0.5620	1.2500	0.8110	1.5000	1.5620	3.1460	BLACK	I-45	ILD-45	0.5620	0.4370	10	0783669 637076
CLWS-3/0-10	2	3/0 AWG	2/0 FLEX	3/0-2 AWG	#10	0.2190	0.5620	0.8850	1.5000	1.5620	2.5010	ORANGE	I-50	ILD-50	0.6090	0.4840	10	0783669 638233
CLWS-3/0-14	2	3/0 AWG	2/0 FLEX	3/0-2 AWG	1/4	0.2810	0.8750	0.8850	1.5000	1.5620	2.8140	ORANGE	I-50	ILD-50	0.6090	0.4840	10	0783669 638271
CLWS-3/0-516	2	3/0 AWG	2/0 FLEX	3/0-2 AWG	5/16	0.3430	0.8750	0.8850	1.5000	1.5620	2.8140	ORANGE	I-50	ILD-50	0.6090	0.4840	10	0783669 638318
CLWS-3/0-38	2	3/0 AWG	2/0 FLEX	3/0-2 AWG	3/8	0.4060	0.8750	0.8850	1.5000	1.5620	2.8140	ORANGE	I-50	ILD-50	0.6090	0.4840	10	0783669 638356
CLWS-3/0-12	2	3/0 AWG	2/0 FLEX	3/0-2 AWG	1/2	0.5620	1.2500	0.8850	1.5000	1.5620	3.1890	ORANGE	I-50	ILD-50	0.6090	0.4840	10	0783669 638394
CLWS-4/0-14	2	4/0 AWG	3/0 FLEX	4/0-1 AWG	1/4	0.2810	0.8750	0.9990	1.5000	1.5620	2.8660	PURPLE	I-54	ILD-54	0.6870	0.5460	10	0783669 639551



SURECRIMP® CLWS 1 HOLE LONG W/SIGHT

Item ID	Figure Number	Conductor Size	Alternate Conductor	Expanded	Bolt/Stud Size	Mounting Hole	Tang Length	Tang Width	Barrel Length	Strip Length	Overall Length	Color Code	Die Index Number	Die Catalog	Outside Diameter	Inside Diameter	Standard Package	NAED/U PC
CLWS-4/0-516	2	4/0 AWG	3/0 FLEX	4/0-1 AWG	5/16	0.3430	0.8750	0.9990	1.5000	1.5620	2.8660	PURPLE	I-54	ILD-54	0.6870	0.5460	10	0783669 639599
CLWS-4/0-38	2	4/0 AWG	3/0 FLEX	4/0-1 AWG	3/8	0.4060	0.8750	0.9990	1.5000	1.5620	2.8660	PURPLE	I-54	ILD-54	0.6870	0.5460	10	0783669 639636
CLWS-4/0-12	2	4/0 AWG	3/0 FLEX	4/0-1 AWG	1/2	0.5620	1.2500	0.9990	1.5000	1.5620	3.2410	PURPLE	I-54	ILD-54	0.6870	0.5460	10	0783669 639674
CLWS-250-516	2	250 kcmil	4/0 FLEX	250 kcmil - 1/0	5/16	0.3430	0.8750	1.0880	1.6880	1.7500	3.0940	YELLOW	I-62	ILD-62	0.7500	0.5930	10	0783669 640670
CLWS-250-38	2	250 kcmil	4/0 FLEX	250 kcmil - 1/0	3/8	0.4060	0.8750	1.0880	1.6880	1.7500	3.0940	YELLOW	I-62	ILD-62	0.7500	0.5930	10	0783669 640717
CLWS-250-12	2	250 kcmil	4/0 FLEX	250 kcmil - 1/0	1/2	0.5620	1.2500	1.0880	1.6880	1.7500	3.4690	YELLOW	I-62	ILD-62	0.7500	0.5930	10	0783669 640755
CLWS-300-516	2	300 kcmil	250 G,H FLEX	300 kcmil - 2/0	5/16	0.3430	0.8750	1.1890	2.0000	2.0620	3.4620	WHITE	I-66	ILD-66	0.8120	0.6600	10	0783669 641790
CLWS-300-38	2	300 kcmil	250 G,H FLEX	300 kcmil - 2/0	3/8	0.4060	0.8750	1.1890	2.0000	2.0620	3.4620	WHITE	I-66	ILD-66	0.8120	0.6600	10	0783669 641837
CLWS-300-12	2	300 kcmil	250 G,H FLEX	300 kcmil - 2/0	1/2	0.5620	1.2500	1.1890	2.0000	2.0620	3.8370	WHITE	I-66	ILD-66	0.8120	0.6600	10	0783669 641875
CLWS-350-38	2	350 kcmil	250 I,K,M FLEX	350 kcmil - 3/0	3/8	0.4060	0.8750	1.2910	2.0000	2.0620	3.4980	RED	I-71	ILD-71	0.8900	0.7030	10	0783669 642957
CLWS-350-12	2	350 kcmil	250 I,K,M FLEX	350 kcmil - 3/0	1/2	0.5620	1.2500	1.2910	2.0000	2.0620	3.8730	RED	I-71	ILD-71	0.8900	0.7030	10	0783669 642995
CLWS-350-58	2	350 kcmil	250 I,K,M FLEX	350 kcmil - 3/0	5/8	0.6560	1.4370	1.2910	2.0000	2.0620	4.0600	RED	I-71	ILD-71	0.8900	0.7030	10	0783669 643039
CLWS-400-38	2	400 kcmil	300 G,H,I,K,	400 kcmil - 4/0	3/8	0.4060	0.8750	1.3650	2.1250	2.1870	3.6670	BLUE	I-76	ILD-76	0.9370	0.7500	6	0783669 644074
CLWS-400-12	2	400 kcmil	300 G,H,I,K,	400 kcmil - 4/0	1/2	0.5620	1.2500	1.3650	2.1250	2.1870	4.0420	BLUE	I-76	ILD-76	0.9370	0.7500	6	0783669 644111
CLWS-400-58	2	400 kcmil	300 G,H,I,K,	400 kcmil - 4/0	5/8	0.6560	1.4370	1.3650	2.1250	2.1870	4.2290	BLUE	I-76	ILD-76	0.9370	0.7500	6	0783669 644159
CLWS-500-38	2	500 kcmil	350 G,H,I,K,	500 kcmil - 250	3/8	0.4060	0.8750	1.5350	2.2500	2.3120	3.8570	BROWN	I-87	ILD-87	1.0620	0.8280	6	0783669 645194
CLWS-500-12	2	500 kcmil	350 G,H,I,K,	500 kcmil - 250	1/2	0.5620	1.2500	1.5350	2.2500	2.3120	4.2320	BROWN	I-87	ILD-87	1.0620	0.8280	6	0783669 645231
CLWS-500-58	2	500 kcmil	350 G,H,I,K,	500 kcmil - 250	5/8	0.6560	1.4370	1.5350	2.2500	2.3120	4.4190	BROWN	I-87	ILD-87	1.0620	0.8280	6	0783669 645279
CLWS-600-38	2	600 kcmil	400 G,H,I,K,	600 kcmil - 250	3/8	0.4060	0.8750	1.7120	2.6870	2.7490	4.3710	GREEN	I-94	ILD-94	1.1870	0.9200	6	0783669 646313
CLWS-600-12	2	600 kcmil	400 G,H,I,K,	600 kcmil - 250	1/2	0.5620	1.2500	1.7120	2.6870	2.7490	4.7460	GREEN	I-94	ILD-94	1.1870	0.9200	6	0783669 646351
CLWS-600-58	2	600 kcmil	400 G,H,I,K,	600 kcmil - 250	5/8	0.6560	1.4370	1.7120	2.6870	2.7490	4.9330	GREEN	I-94	ILD-94	1.1870	0.9200	6	0783669 646399
CLWS-650-516	2	650 kcmil	500 G,H,I,K,	650 kcmil - 350	5/16	0.3430	0.8750	1.7640	2.6870	2.7490	4.4310	PINK	I-99	ILD-99	1.2170	0.9580	6	0783669 647235



SURECRIMP® CLWS 1 HOLE LONG W/SIGHT

Item ID	Figure Number	Conductor Size	Alternate Conductor	Expanded	Bolt/Stud Size	Mounting Hole	Tang Length	Tang Width	Barrel Length	Strip Length	Overall Length	Color Code	Die Index Number	Die Catalog	Outside Diameter	Inside Diameter	Standard Package	NAED/U PC
CLWS-650-38	2	650 kcmil	500 G,H,I,K,	650 kcmil - 350	3/8	0.4060	0.8750	1.7640	2.6870	2.7490	4.4310	PINK	I-99	ILD-99	1.2170	0.9580	6	0783669 647273
CLWS-650-12	2	650 kcmil	500 G,H,I,K,	650 kcmil - 350	1/2	0.5620	1.2500	1.7640	2.6870	2.7490	4.8060	PINK	I-99	ILD-99	1.2170	0.9580	6	0783669 647310
CLWS-650-58	2	650 kcmil	500 G,H,I,K,	650 kcmil - 350	5/8	0.6560	1.4370	1.7640	2.6870	2.7490	4.9930	PINK	I-99	ILD-99	1.2170	0.9580	6	0783669 647358
CLWS-700-38	2	700 kcmil	500 G,H,I & K,M	700 kcmil - 350	3/8	0.4060	0.8750	1.8160	2.6870	2.7490	4.4310	PINK	I-99	ILD-99	1.2500	0.9910	6	0783669 648195
CLWS-700-12	2	700 kcmil	500 G,H,I & K,M	700 kcmil - 350	1/2	0.5620	1.2500	1.8160	2.6870	2.7490	4.8060	PINK	I-99	ILD-99	1.2500	0.9910	6	0783669 648232
CLWS-700-58	2	700 kcmil	500 G,H,I & K,M	700 kcmil - 350	5/8	0.6560	1.4370	1.8160	2.6870	2.7490	4.9930	PINK	I-99	ILD-99	1.2500	0.9910	6	0783669 648270
CLWS-750-38	2	750 kcmil	600 G,H,I,M	750 kcmil - 500	3/8	0.4060	0.8750	1.9010	2.8750	2.9370	4.6520	BLACK	I-106	ILD-106	1.3130	1.0310	6	0783669 648911
CLWS-750-12	2	750 kcmil	600 G,H,I,M	750 kcmil - 500	1/2	0.5620	1.2500	1.9010	2.8750	2.9370	5.0270	BLACK	I-106	ILD-106	1.3130	1.0310	6	0783669 648959
CLWS-750-58	2	750 kcmil	600 G,H,I,M	750 kcmil - 500	5/8	0.6560	1.4370	1.9010	2.8750	2.9370	5.2140	BLACK	I-106	ILD-106	1.3130	1.0310	6	0783669 648997
CLWS-1000-38	2	1000 kcmil	750 G,H,I FLEX	1000 kcmil -	3/8	0.4060	0.8750	2.1690	3.0000	3.0620	4.9000	WHITE	I-125	ILD-125	1.5000	1.1720	3	0783669 650433
CLWS-1000-12	2	1000 kcmil	750 G,H,I FLEX	1000 kcmil -	1/2	0.5620	1.2500	2.1690	3.0000	3.0620	5.2750	WHITE	I-125	ILD-125	1.5000	1.1720	3	0783669 650471
CLWS-1000-58	2	1000 kcmil	750 G,H,I FLEX	1000 kcmil -	5/8	0.6560	1.4370	2.1690	3.0000	3.0620	5.4620	WHITE	I-125	ILD-125	1.5000	1.1720	3	0783669 650518