

CCG Portable Heater

CCG-WB Heater with Bracket

CCG-RF Hard-Wired Heater



Features

Color

- Standard: almond.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 240/208V, 1-phase.

Construction

- Handle may be used as a reel for the electric cable and as attach point for the bracket.
- 6 ft. (2 m) molded electric cable for extra durability.
- Safely recessed thermostat knob reduces heater size to a minimum.
- High-limit temperature control with automatic reset.

Fan

- Enclosed motor (-MF model).
- Open motor (-MO model).

Note: The open motor is not intended for use in a dusty environment.

- 300 cfm fan.

Heating element

- Helical coil nickel-chromium alloy wire protected by ceramic insulators.
- Heating element provides instant heat.

Temperature rise

- 28 °C (51 °F).

Control

- Built-in thermostat included.

Installation

- CCG & CCG-WB: Must be plugged into a grounded 3-pronged outlet, 30A, 250VAC.

Note: Always unplug heater when not in use.

- CCG-WB & CCG-RF: Wall or ceiling mounting using the supplied bracket which allow 360° rotation of the heater and prevent it from tipping over.
- CCG-RF: Hard-wired into an electrical junction box (not included).

Warranty

- 2-year warranty against defects (-MO model).
- 3-year warranty against defects (-MF model).

Application


- Workshop, shed, garage.



Grounded 3-Pronged Outlet
CCG & CCG-WB



NEMA 6-30R
30A, 250VAC

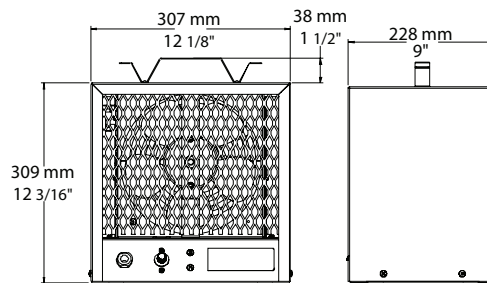

Models

Product #	Watts	Volts	Grounded 3-pronged outlet	Motor type	Weight lb	kg
CCG4800AM-MF-TB6	4800/3600	240/208	30A, 250VAC	Enclosed	16.0	7.3
CCG4800AM-MO-TB6	4800/3600	240/208	30A, 250VAC	Open	16.0	7.3
CCG4800AMWB-MO-TB6 ¹	4800/3600	240/208	30A, 250VAC	Open	16.0	7.3
CCG4800AMRF-MO-TB6 ¹	4800/3600	240/208	-	Open	16.0	7.3

¹ Mounting bracket included.
Standard color is almond.