



Main

Range of Product	Harmony Relay
Product or Component Type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay RXM 4 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	12 A 2 C/O relays 6 A 4 C/O relays
[Ue] rated operational voltage	< 250 V AC
Connections - terminals	Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm ² AWG 20...AWG 16) flexible with cable end Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm ² AWG 20...AWG 16) solid without cable end
Fixing mode	Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.22 in (31 mm)
Net Weight	0.16 lb(US) (0.073 kg)

Environment

Standards	IEC 61984
Product Certifications	CSA[RETURN]GOST[RETURN]Lloyd's[RETURN]UL
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Ordering and shipping details

Category	21128-ZELIO ICE CUBE RELAY ACCESSORIES
Discount Schedule	CP2
GTIN	3606480566769
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.44 in (3.65 cm)
Package 1 Width	1.22 in (3.1 cm)
Package 1 Length	3.70 in (9.4 cm)
Package 1 Weight	1.41 oz (40 g)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations


Contractual warranty

Warranty	18 months
----------	-----------

Socket Only

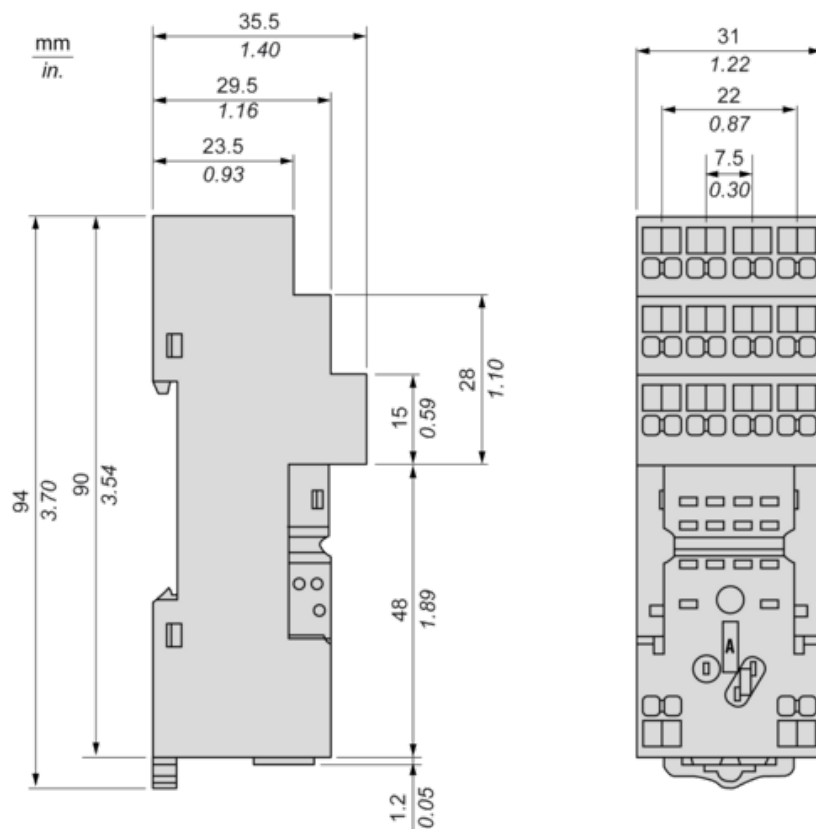


Socket with Relay and Metal Maintaining Clamp

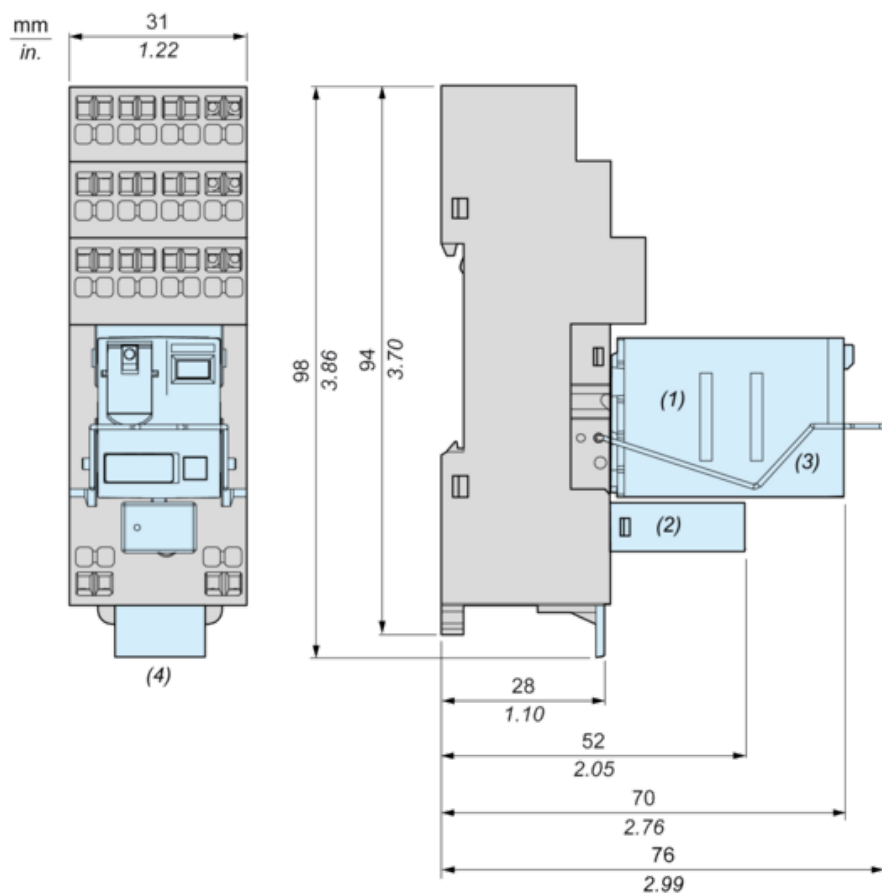


- (1) Relay
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend

Socket with Relay and Plastic Maintaining Clamp

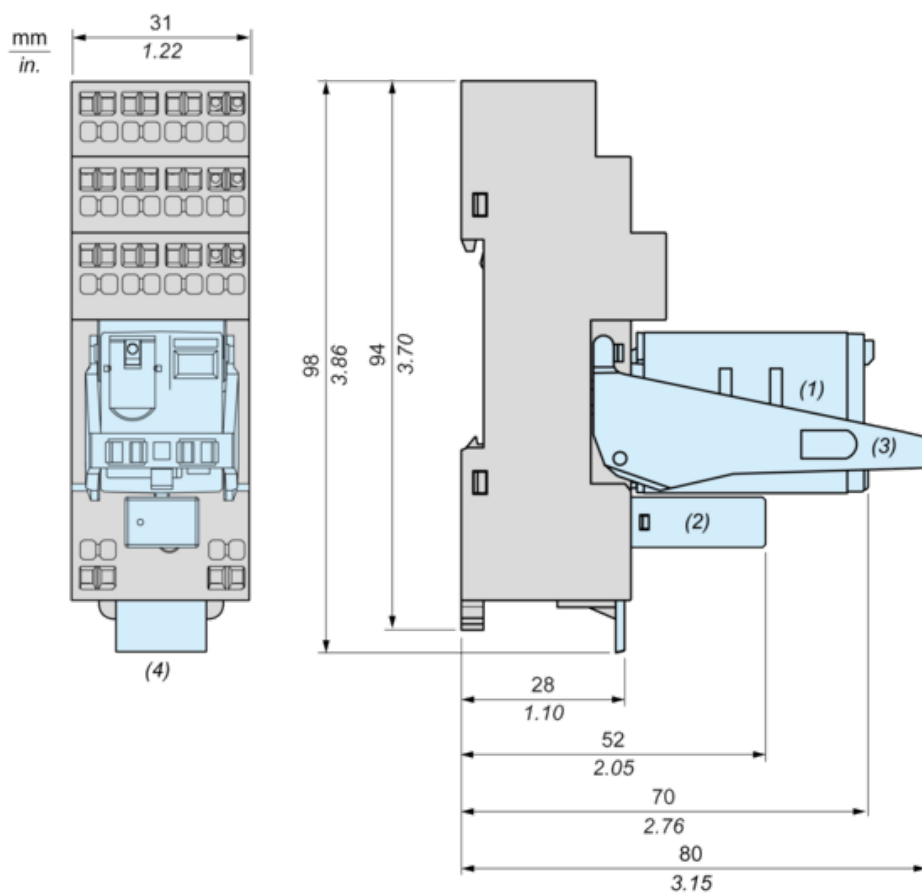


- (1) Relay
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend

Wiring Diagram

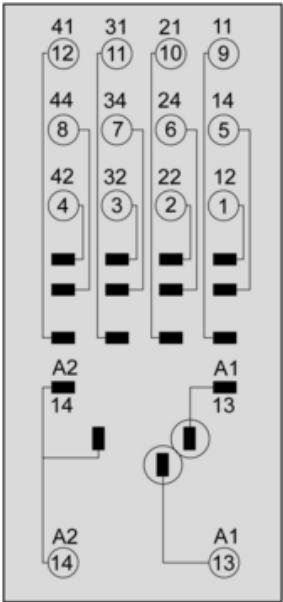


Wiring Recommendations


Exposed Conductor Length



Flat-Blade, Parallel-tip, 2.5 mm diameter

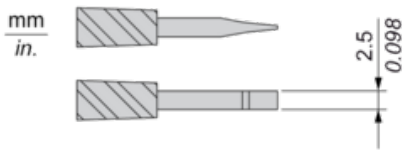


Cable Hole and Tool Hole



- (1) Cable Hole
- (2) Tool Hole

Installation and Uninstallation

Installation : Push In (Insert cable)



Uninstallation : Pull Out (Remove cable)

