

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION

Order code: 65882
 Description: TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD
 UPC: 69549658820
 Case quantity: 25

FEATURES AND SPECIFICATIONS

Reel Total Length: 16.4 ft. (5 m)
 Jacketed or Unjacketed: Unjacketed
 Wire gauge: 22 AWG
 Number of LEDs: 60 LEDs per meter
 18 LEDs per foot
 Cuttable length: 3 ¹⁵/₁₆ in. (100 mm) or every 6 LED chips
 Maximum run length: 61 ft. (19 m)
 Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA

Volts (V): 24
 Colour temperature (K): 4 000 (Cool white)
 Watts per length: 24 W per reel
 4.8 W per meter
 0.12 W per inch
 Light output per length: 1 780 lm per reel
 356 lm per meter
 9 lm per inch
 Efficacy (lm/W): 74
 CRI: 90+
 Life (hrs): 50 000
 Beam angle (°): 120

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



CONSTANT
VOLTAGE



DIMMABLE



DRY



CRI
90+



3
YEARS

WARRANTY



RoHS

COMPLIANT




c UL us

For complete dimmer and warranty information visit www.standardpro.com.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 November 27, 2017

ORDERING INFORMATION

Order code: 65882
Description: TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD
UPC: 69549658820
Case quantity: 25

TECHNICAL DRAWINGS

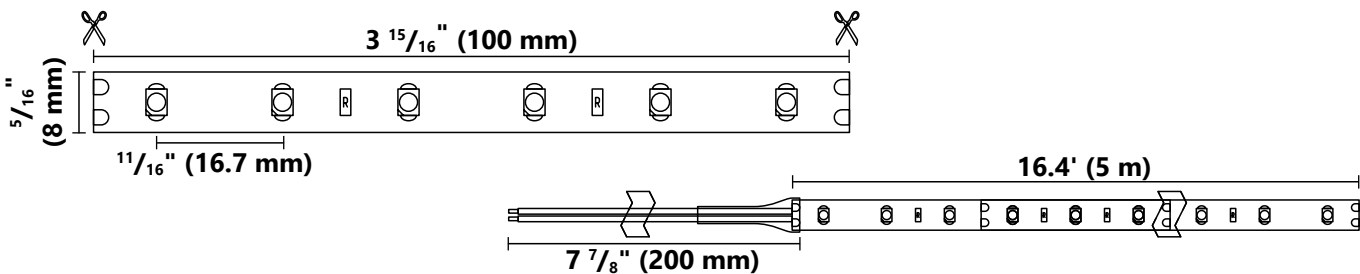

Extrusions, drivers and accessories are available (sold seperatly).
Custom lenghts available upon request. Ask your sales representative for more information.
This LED Tape is also available in 2.9 W and 4.4 W and in 12 V.

CAUTIONS

- Turn off power before inspection, installation or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in dry locations.
- Do not open – no user serviceable inside.
- This device is not intended for use with emergency exit fixtures.
- Use only Class 2 rated components not exceeding 30VDC or 15 VAC when installing the outline lighting in wet locations or 60 VDC or 42.4 peak ac when installing the outline lighting in a dry or damp location.
- Do not go over 5 amps to match class 2 requirements.
- 24 VDC input only.

Qty	Description	Price

I accept the specifications of the product configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____