


CQO124L125PGC

Loadcentre, QO, 1 phase, 24 spaces, 44 circuits, 125A main lugs, PoN, NEMA1, gnd bar, combo cover, CSA

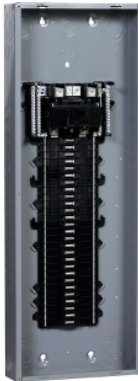

Main

Range of product	QO
Product or component type	Load Center
Cover type	Combination flush/surface cover

Complementary

Tightening torque	Main lugs: 50 lb.in, AWG 6...AWG 2/0, aluminium/copper
Load center type	Main lugs
Line Rated Current	125 A
Number of spaces	24
Short-circuit current	65 kA
Number of circuits	44
Phase	1 phase
[Ue] rated operational voltage	240 V AC
Device composition	Grounding bar included (not installed)
Height	20.91 in (531 mm)
Width	14.25 in (362 mm)
Depth	3.74 in (95 mm)

Environment

NEMA degree of protection	NEMA 1 indoor
Ambient air temperature for operation	23 °F (-5 °C) 104 °F (40 °C)
Product certifications	CSA

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration