

# Product data sheet

## Characteristics

# XZCRV1512041C5

jumper cable XZ - male straight M12 4-pin -  
female elbowed M12 4-pin - PVC 5m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins elbowed screw-on
Collar material	Metal
Cable composition	4 x 0.25 mm <sup>2</sup>
Cable length	16.40 ft (5 m)
Wire insulation material	PVC
Cable outer diameter	0.18 in (4.6 mm)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.51 lb(US) (0.23 kg)

### Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

### Packing Units

Package 1 Weight	0.43 lb(US) (0.194 kg)
Package 1 Height	0.200 dm
Package 1 width	1.900 dm
Package 1 Length	1.600 dm


**Offer Sustainability**

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

**Contractual warranty**

Warranty	18 months
----------	-----------

Dimensions

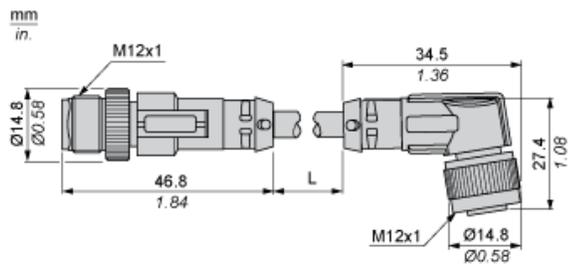

L : Length of cable

Connections and Schemes

