

Project		Catalog #		Type	
Prepared by		Notes		Date	



HALO

RLS 6" Adjustable Sloped Ceiling Canless Downlight

These downlights are designed to deliver bright, powerful lighting down where you need it instead of up in the rafters. Use the internal mechanism to tilt and aim your lighting straight down from sloped ceilings between 9° and 45° (12-2 and 12-12 pitches). The RLS offers 5-color seleCCTable™ technology and flicker-free dimming to 5% in matte white or matte black finishes.

Typical Applications Residential • Hospitality • Retail • Healthcare

Interactive Menu

- Order Information page 2
- Product Specifications page 3
- Energy Data page 4
- Photometric Data page 4
- Product Warranty




Refer to ENERGY STAR® Certified Products List.
Can be used to comply with California Title 24 High Efficacy requirements.⁽¹⁾
Certified to California Appliance Efficiency Database under JAB. ⁽¹⁾



Top Product Features

- Round 6" Canless LED Adjustable Downlights suitable for remodel and retrofit installations (For new construction, use with canless mounting frames/plates)
- Installs in 2x6 framing and rated for IC (insulation contact) or non-IC applications (no housing required)
- **Lens & Trim:** Recessed baffle trim, integrated optic
- **5-Color Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K; 90+ CRI
- **Brightness:** 1600 lumens (nominal)
- **Dimming:** Dims to 5% (phase cut LE/TE); 120V input
- Meets AIR-TITE and code compliance for additional energy savings
- **Life:** 50,000 hrs of maintenance-free operation in damp locations
- 5-year warranty

Dimensional and Mounting Details

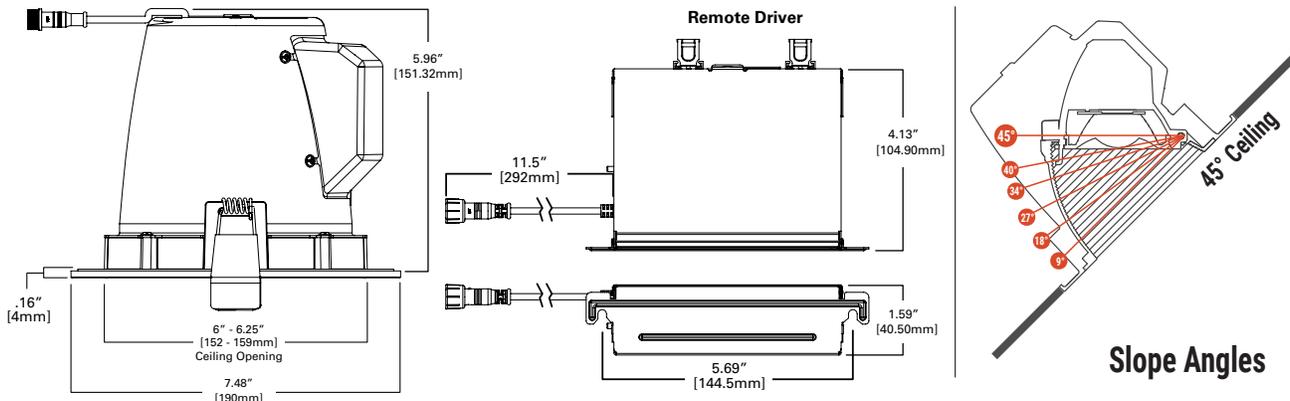

Order Information

Catalog Number	Module	Lumens (nominal)	CRI/CCT	Driver	Finish	Mounting	Packaging
RLS6159FS1EWHDMR	RLS 6-inch Adjustable Sloped Ceiling Canless Downlight	1600 lm	90+ CRI, field selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K	120V 60Hz, LE & TE phase cut 5% dimming	Matte White	Canless Direct Mount	Recyclable 4-color plastic-free packaging
RLS6159FS1EMBDMR	RLS 6-inch Adjustable Sloped Ceiling Canless Downlight	1600 lm	90+ CRI, field selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K	120V 60Hz, LE & TE phase cut 5% dimming	Matte Black	Canless Direct Mount	Recyclable 4-color plastic-free packaging



Accessories (sold separately)

Accessories	
Extension Cables HLB06FSEC = 6 ft. Extension Cable HLB12FSEC = 12 ft. Extension Cable HLB20FSEC = 20 ft. Extension Cable	New Construction Mounting Frames* MF6RC = 6" Round Mounting Frame with Drywall Collar HL6RSMF = 6" Round or Square Mounting Frame New Construction Smash Plate* SP346RS = 3", 4", and 6" Canless New Construction Smash Plate



MF6RC



HL6RSMF



SP346RS

* New Construction Mounting Frames / Smash Plates reserve ceiling positions and holds canless junction boxes during rough-in wiring phase.

Product Specifications

Selectable System

- Use the 5-position color selector switch to choose between: 2700K, 3000K, 3500K, 4000K, and 5000K

Module – Trim

- LED module consists of LED (chip on board), optical assembly, driver and self-flanged trim
- Regressed baffle style trim
- Installs in 2x6 (5.5" tall ceiling plenum spaces) [2x4 (3.5" tall ceiling plenum spaces)]
- Adjustment mechanism tilts the light engine from 9° up to 45° to match 2/12 to 12/12 ceiling pitches
- Heat sink designed to conduct heat away from the LED array, keeping the junction temperatures below specified maximums, even when installed in insulated ceiling environments
- Achieving L70 at 50,000 hours in IC and non-IC applications

LED Array

- Mid power LED array provides a uniform source with high efficiency and no pixilation
- 90 CRI minimum, R9 greater than 50
- Chip on board LEDs provide a uniform source with high efficiency and no pixilation
- Color accuracy at 4 SDCM in between endpoints, provide excellent color quality and uniformity
- Available in 5-color field selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K

Optical Assembly

- Regressed lens
- Impact-resistant polycarbonate
- Integrated optical assembly provides flood distribution useful for general and task lighting in sloped ceiling applications
- Diffuse injection molded lens with contoured profile provides uniformity and a familiar lamp like appearance
- Meets ENERGY STAR® color angular uniformity requirements

Driver

- Remote 120V 60 Hz constant current driver provides noise-free, high-efficiency operation
- Dimmable: Continuous, flicker-free phase cut (leading-edge/trailing-edge - LE/TE) dimming from 100% to 5% output with compatible dimmers
- See this fixture's Dimming Guide for compatible dimmers
 - Tip:** For optimal dimming performance, consider dimmers with low-end trim adjustment; note that some dimmers require a neutral wire in the box
- Consult dimmer manufacturer for compatibility and conditions of use

Junction Box

- Die formed metal driver / junction box with captive hinged junction box cover
- Listed for (6) #12 AWG 90° C splice conductors, 2-in, 2-out plus (2) ground
- (3) 1/2" conduit pry-outs
- (2) Slide-N-Side™ non-metallic (NM) wire traps accept 14-2, 14-3, 12-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian NM cable
- (3) 4-port push wire nuts for quick and reliable mains voltage connections
- Integral mounting facilitates direct mounting to building structure or mounting frame

Installation & Retention

- No additional housing or junction box required (Not for installation in recessed cans)
- The included remote driver / junction box may be used in direct contact with insulation (IC)
- Can be installed in 1/2" to 1-1/4" thick ceilings
- 4" round ceiling cutout
- Installer must cut hole and install fixture into aperture with the clips compressed
- When released, the spring clips will rest on the back side of the ceiling material holding the fixture in place
- For new construction applications, use HALO Canless Mounting Frames or Smash Plates prior to drywall installation
- Fixture and junction box can be removed from below the ceiling for service or replacement

Gasket

- Open cell gaskets achieve restrictive airflow requirements without additional caulking

Compliance

- UL Certified US and Canada Type IC suitable for direct contact with air permeable insulation
- Damp location listed
- Not recommended for use in direct contact with spray foam insulation, reference NEMA LSD57-2013
- Airtight certified per ASTM-E283
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
- EMI/RFI emissions per FCC 47CFR Part 15 consumer limits
- Contains no mercury or lead and RoHS compliant¹
- Photometric testing in accordance with IES LM79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11
- Compliant with California Title 24 High Efficiency LED under JA8, reference Modernized Appliance Efficiency Database System (MAEDBS) for 2019 JA8 High Efficacy Lighting ¹
- Can be used International Energy Conservation Code (IECC) high efficiency luminaire compliance.
- ENERGY STAR® listed, reference database for current listings

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/warranty

Energy Data


	RLS6159FS1EWHDMR	RLS6159FS1EMBDMR
Lumens	1500 Series	1500 Series
Input Voltage	120V	120V
Input Current	157.7 (mA)	157.7 (mA)
Input Power	19.0 (W)	19.0 (W)
Efficiency	85.8 (LPW)	83.8 (LPW)
Inrush (A)	3.3 (A)	3.3 (A)
THD	≤ 20%	≤ 20%
PF	≥ 0.90	≥ 0.90
T Ambient (C)	-30 to +40	-30 to +40
Sound Rating	≤ 22 dba	≤ 22 dba

RLS6159FS1EWHDMR (Equivalent to 100W Incandescent)				
CCT	Watts	Lumens	LPW	CRI
2700K	19.0	1588	83.6	94
3000K	19.0	1630	85.8	94
3500K	19.0	1670	87.9	94
4000K	19.0	1705	89.7	93
5000K	19.1	1745	91.4	91

RLS6159FS1EMBDMR (Equivalent to 100W Incandescent)				
CCT	Watts	Lumens	LPW	CRI
2700K	19.2	1580	82.3	94
3000K	19.4	1625	83.8	93
3500K	19.4	1675	86.3	95
4000K	19.5	1720	88.2	95
5000K	19.7	1785	90.6	92

Photometric Data

[View IES files](#)

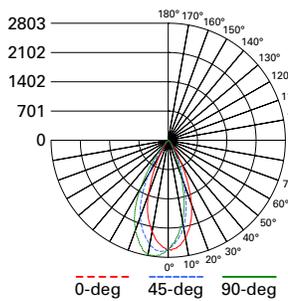


RLS6159FS1EWHDMR-3000K

Spacing criterion:
 (0-180) 1.19 | (90-270) 1.19 | (Diagonal) 1.28
 Beam Angle: 45°
 Field Angle: 70°
 Lumens: 1630
 Input Watts: 19 W
 Efficacy: 85.8 LPW
 UGR: 1.8
 Test Report: P571723

Zonal Lumen	Lumens	% Lumens
0-30	1271	78
0-40	1492	91.5
0-60	1603	98.3
0-90	1625	99.7

TM-30-15	Rf = 93
	Rg = 99
CRI/CIE	Ra = 96
	R9 = 71

CCT - Range of 2700K- 5000K

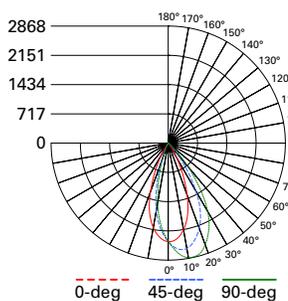

RLS6159FS1EMBDMR-3000K

Spacing criterion:
 (0-180) 0.69 | (90-270) 0.77 | (Diagonal) 0.75
 Beam Angle: 45°
 Field Angle: 70°
 Lumens: 1625
 Input Watts: 19.4 W
 Efficacy: 83.8 LPW
 UGR: 1.8
 Test Report: P888022

Zonal Lumen	Lumens	% Lumens
0-30	1208	74.3
0-40	1488	91.6
0-60	1612	99.2
0-90	1621	99.8

TM-30-15	Rf = 94
	Rg = 100
CRI/CIE	Ra = 93
	R9 = 79.9

CCT - Range of 2700K- 5000K

