Technical Information Bulletin
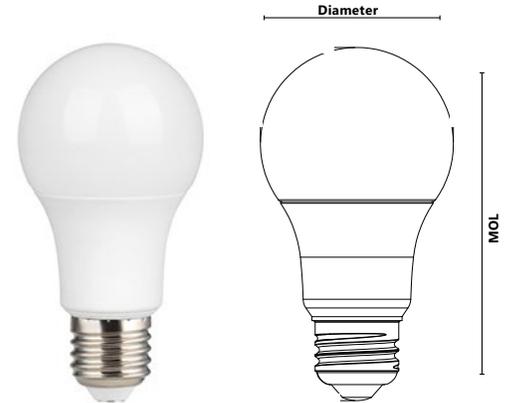## LED Lamps

STANDARD®

Date:		**Name of distributor:**	
In hands date of project:		**Client #:**	
Project name/Number:		**Name of end user:**	

ORDERING INFORMATION

Order code: 67959
Description: LED/A19/S5/12W/50K/STD
UPC: 69549679597
Case quantity: 1 / 100

Diameter

MOL : 4 15/16 in. (125 mm)   **Dia. : 2 9/16 in. (65 mm)**

PERFORMANCE DATA

Shape:	A19
Wattage (W):	12
Base:	E26
Lamp voltage (VAC):	120
Colour temperature (K)**:	5 000
Life L70 (hrs):	25 000
Initial lumens (lm)*:	1 100
Initial lumens per watt (lm/W):	92
CRI:	80
Beam angle (°):	220
Power factor:	0.70
Operating temperature range:	- 30 °C / - 22 °F to 40 °C / 104 °F

*Initial lumens range: +/- 10 %   ****Typical colour temperature range: +/- 5 %**

3 yrs **warranty**   **6 damp** *location*   **dimmable**   **enclosed** *fixture*   **ICES** *005*

UL us   FC   RoHS   ENERGY STAR

CAUTIONS

• Turn power off before inspection, installation, or removal.
• Risk of electrical shock – do not use where directly exposed to water or weather.
• Suitable for use in totally enclosed luminaires.
• Suitable for use in damp locations.
• Do not open – no user serviceable parts inside.
• Use only on 120 VAC, 60Hz circuits.
• This device is not intended for use with emergency exit fixtures or emergency exit lights.
• Compatible with most dimmers.
• For complete dimmer and warranty information visit www.standardpro.com.

COMPATIBLE DIMMERS

Brand	Model
Lutron	PD-5NE[1], PD-6WCL, RRD-6NA[2], DVCL-153P, CTCL-153P, DVCL-253P[3], DVRP-253, SELV-300P
Leviton	066EV, IPE04-1LZ

[1] Lamp may flicker at low dimming setting
[2] Power may turn off at low dimming setting
[3] Dimming range may vary

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name:
Company:
Signature: Date:

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

June 30, 2021