

# Onyx Square RL-ONYX-SQ-60-SS

Recessed Light

Product Finishes: 





## Specifications:

**Voltage:** 12V AC  
**Wattage:** 4  
**Volt Amps:** 5.5  
**Lumens:** 200  
**Color Temp:** 2700k  
**IP Rating:** 67  
**CRI:** 92.5  
**Light Source:** Integrated

**Material:** Polycarbonate  
**Ring Material:** Stainless steel  
**Cable Length:** 36"  
**Lux (lx):** 5.1  
**Candelas (cd):** 191  
**Rated Life:** 50,000 hours  
**Warranty:** 7-year comprehensive  
**Dimmable:** No  
**Color-Changing:** No  
**Drive-Over Rated:** Yes


**Product Uses:**  
Pavers, Concrete, Walls,  
Fences, Retaining Walls

**Accessories:**  
Fang

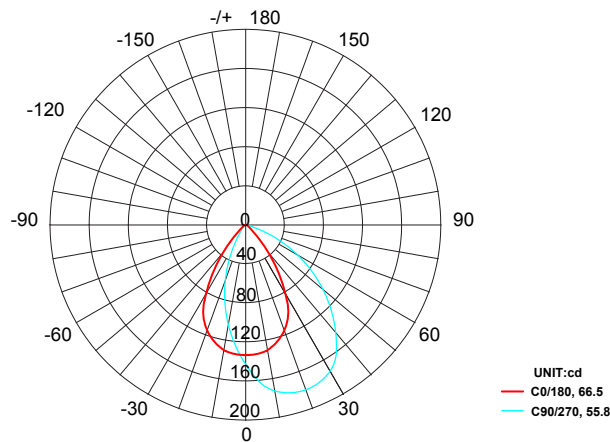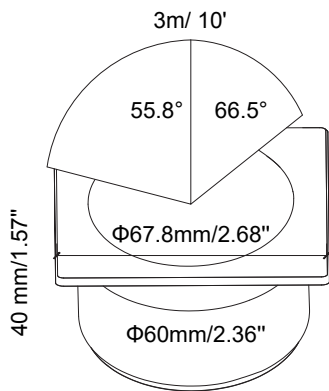

Max. Luminous intensity : 191 cd

AVERAGE BEAM ANGLE (50%): 61.1 DEG
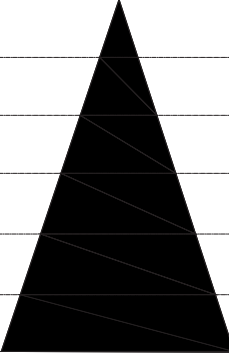
| DISTANCE (FT) | CENTER BEAM (FC)<br>Eavg/Emax | ILLUMINANCE - CONE OF LIGHT                                                         | BEAM DIAMETER (FT) |
|---------------|-------------------------------|-------------------------------------------------------------------------------------|--------------------|
| 3.25          | 7.70/14.65                    |  | 3.48               |
| 6.25          | 1.92/3.66                     |                                                                                     | 6.96               |
| 10            | 0.88/1.67                     |                                                                                     | 10.70              |
| 13            | 0.48/0.91                     |                                                                                     | 13.91              |
| 16.5          | 0.31/0.59                     |                                                                                     | 17.62              |
| 20            | 0.22/0.42                     |                                                                                     | 21.40              |

