




T3A 3 CONDUCTOR AL/CU

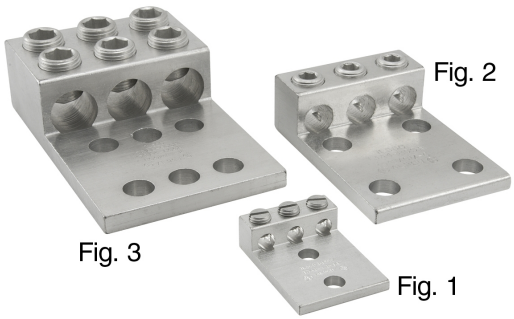

- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-Tin plated.
- UL 486A/B 90° C Listed and is CSA certified.
- Suitable for use in circuits rated 35KV or less; proper high voltage spacing and insulation techniques must be used.
- Suitable for use with either copper or aluminum conductors.
- Chamfered wire entry provides ease of installation.
- Must be mounted with a minimum of 2 bolts.
- UL File E6207
- * Mounting hole spacing from side to side, hole to hole is .875".

Item ID	Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	NAED/UPC Number
T3A2-800N	* 3	800 kcmil-350 kcmil	1/2	1-3/4	5.9700	4.1250	1.8130	5/16	1	0783669900606