




Wire Strippers/Cutters

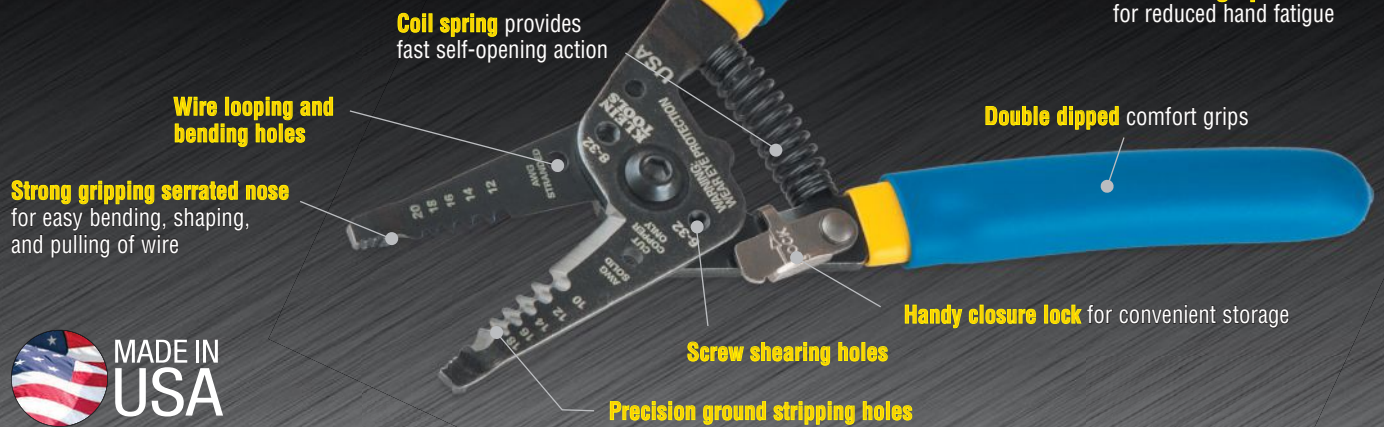

Klein-Kurve™ Wire Strippers/Cutters

Includes core features plus:

- Easy-to-read markings
- Precision shear-type blades
- Narrow nose fits into tight places
- Glow in the dark grips to easily locate your tool in dark or low lit areas (Cat. No. 11054GLW)



11054

Cat. No.	Strips and Cuts	Screw Shearing	Overall Length	Handle Color	Weight
11053	6-12 AWG Stranded (16.0-4.0 mm ²)	6-32 and 8-32	7.125" (181 mm)	Blue/Red	0.34 lb (0.15 kg)
11054	8-16 AWG Solid (10.0-1.5 mm ²); 10-18 AWG Stranded (6.0-1.0 mm ²)	6-32 and 8-32	7.125" (181 mm)	Blue/White	0.34 lb (0.15 kg)
11054GLW	8-16 AWG Solid (10.0-1.5 mm ²); 10-18 AWG Stranded (6.0-1.0 mm ²)	6-32 and 8-32	7.125" (181 mm)	Glow in the Dark	0.34 lb (0.15 kg)
11055	10-18 AWG Solid (6.0-1.0 mm ²); 12-20 AWG Stranded (4.0-0.50 mm ²)	6-32 and 8-32	7.125" (181 mm)	Blue/Yellow	0.34 lb (0.15 kg)
11057	20-30 AWG Solid (0.50-0.05 mm ²); 22-32 AWG Stranded (0.35-0.03 mm ²)	6-32 and 8-32	7.125" (181 mm)	Blue/Red	0.32 lb (0.15 kg)
K1412	NM-B Cable 12/2 and 14/2; 12-14 AWG Solid (4.0-2.5 mm ²); 14-16 AWG Stranded (2.5-1.5 mm ²)	6-32 and 8-32	7.75" (196.9 mm)	Yellow/White	0.41 lb (0.19 kg)
K1412CAN	NMD-90 Cable 12/2 and 14/2; 12-14 AWG Solid (4.0-2.5 mm ²); 14-16 AWG Stranded (2.5-1.5 mm ²)	6-32 and 8-32	7.75" (196.9 mm)	Yellow/White	0.41 lb (0.19 kg)

Klein-Kurve™ Wire Strippers/Crimpers/Cutters

Includes core features plus:

- Crimps insulated and non-insulated connectors
- Tip designed to grab, pull and bend the smallest of wires
- Reinforced head reduces flex
- Optimized for ideal leverage when stripping and crimping
- Precision shear-type cutting blades for easier cutting
- Do no use to cut steel wire



1019

Cat. No.	Strips and Cuts	Screw Shearing	Crimping Capacity	Overall Length	Handle Color	Weight
1009	10-20 AWG Solid (6.0-0.50 mm ²); 12-22 AWG Stranded (4.0-0.35 mm ²)	6-32 and 8-32	10-22 AWG (6.0-0.35 mm ²)	7.75" (196.9 mm)	Gray/Yellow	0.34 lb (0.15 kg)
NEW 1019	10-26 AWG Solid (6.0-0.14 mm ²); 12-28 AWG Stranded (4.0-0.10 mm ²)	6-32 and 8-32	10-22 AWG (6.0-0.35 mm ²) Insulated and Non-insulated Terminals; B-Connectors; Scotchlok® IDC Connectors	7.75" (196.9 mm)	Gray/Red	0.34 lb (0.15 kg)

