


illuminate

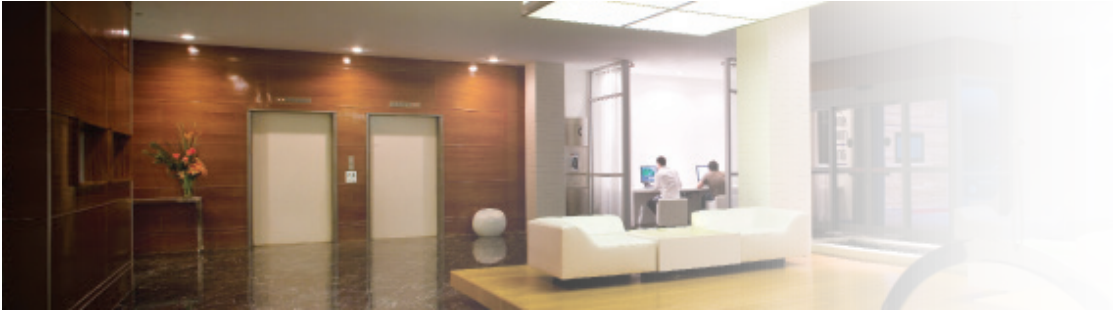

The bright white radiance of GE's LED A-Line lamps is not just something you see, it's something you feel.

LED A-Line general purpose lamps

GE offers dimmable LED A-Line lamps as excellent replacements for standard 25-watt, 40-watt, 60-watt, 75-watt and 100-watt incandescent lamps.

LOW-COST OPERATION

- For example, a 100-watt incandescent replacement lamp using 13 watts of energy and producing 800 lumens can save over \$129 in energy costs over the rated life of the lamp versus a standard 840 lumen, 60-watt incandescent A19 based on \$0.11 per kWh
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent or halogen light sources

EXCELLENT COLOR RENDERING

- Available with a CRI of 78 - 80

COLOR TEMPERATURE

- Halogen-like color
- Available in 2400K, 2700K, 3000K, 4000K and 5000K

LONG LIFE

- Up to 25,000 hours rated life (L70)

DIMMABLE

- Dims from 100% to as low as 10%

ENVIRONMENTALLY CONSCIOUS

- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

GE QUALITY AND RELIABILITY

- 3-year limited warranty

To learn more about saving money and energy,
go to: gelighting.com/ThinkLED

When you Think LED lighting, Think GE.

ecomagination™



imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

LED A-Line general purpose lamps

A-Line Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information	
A-15																		
	MED	4	34038	LED4DA15-W3/827	120	6	3.5	300		2700	80	40W	15,000	Yes		Damp	White	
			34051	LED4DA15-C3/827	120	6	3.5	300		2700	80	40W	15,000	Yes		Damp	Clear	
A-19																		
	MED	6	69115	LED6DA19/827	120	6	4.4	480		2700	80	40W	15,000	Yes	★	Damp	White, Omnidirectional	
			69118	LED6DA19/830	120	6	4.4	480		3000	80	40W	15,000	Yes	★	Damp	White, Omnidirectional	
			69132	LED6DA19/840	120	6	4.4	480		4000	80	40W	15,000	Yes	★	Damp	White, Omnidirectional	
			69144	LED6DA19/850	120	6	4.4	480		5000	80	40W	15,000	Yes	★	Damp	White, Omnidirectional	
	MED	7	14063	LED7DAV3/827W	120	6	4.6	470		2700	80	40W	25,000	Yes		Damp	White, Semi-Omni	
			95928	LED7DAV3/5K	120	6	4.6	500		5000	80	40W	25,000	Yes		Damp	White, Semi-Omni	
			34238	LED7DA19/824	120	6	4.44	450		2400	80	40W	25000	Yes		Damp	White	
				10	69117	LED10DA19/827	120	6	4.4	800		2700	80	60W	15,000	Yes	★	Damp
69119	LED10DA19/830	120			6	4.4	800		3000	80	60W	15,000	Yes	★	Damp	White, Omnidirectional		
69133	LED10DA19/840	120			6	4.4	800		4000	80	60W	15,000	Yes	★	Damp	White, Omnidirectional		
69146	LED10DA19/850	120			6	4.4	800		5000	80	60W	15,000	Yes	★	Damp	White, Omnidirectional		
	10.5		95927	LED11DAV3/5K	120	6	4.4	850		5000	80	60W	15,000	Yes		Damp	White, Semi-Omni	
			GU24	29268	LED11DA19/824	120	6	4.44	800		2400	80	60W	25,000	Yes		Damp	White, Omnidirectional
				74357	LED11DA19827GU24	120	6	4.4	800		2700	80	60W	25,000	Yes		Damp	White, Omnidirectional
				A-21														
	MED	12	76037	LED12DA19/827	120	6	5.16	1100		2700	80	75W	15,000			Damp	White, Omni, ES 2.0	
			76041	LED12DA21/830	120	6	5.16	1100		3000	80	75W	15,000			Damp	White, Omni, ES 2.0	
			76045	LED12DA21/840	120	6	5.16	1100		4000	80	75W	15,000			Damp	White, Omni, ES 2.0	
			76102	LED12DA21/850	120	6	5.16	1100		5000	80	75W	15,000			Damp	White, Omni, ES 2.0	
	MED	12	73404	LED12DA21/850FE	120	6	5.31	1100		5000	80	75W	25,000	Yes		Enclosed	White, Enclosed, Omni	
			73384	LED12DA21/830FE	120	6	5.31	1100		3000	80	75W	25,000	Yes		Enclosed	White, Enclosed, Omni	
			12422	LED13DA212/827	120	6	5.28	1100		2700	80	75W	25,000	Yes		Damp	White, Omnidirectional	
			94936	LED14DA21/827W	120	6	5.28	1100		2700	80	75W	15,000	Yes		Damp	White, Semi-Omni	
	15		76038	LED15DA21/827	120	6	5.16	1600		2700	80	100W	15,000			Damp	White, Omni, ES 2.0	
			76043	LED15DA21/830	120	6	5.16	1600		3000	80	100W	15,000			Damp	White, Omni, ES 2.0	
			76060	LED15DA21/840	120	6	5.16	1600		4000	80	100W	15,000			Damp	White, Omni, ES 2.0	
			76117	LED15DA21/850	120	6	5.16	1600		5000	80	100W	15,000			Damp	White, Omni, ES 2.0	
	16		12349	LED16DA212/827	120	6	5.28	1600		2700	80	100W	25,000	Yes		Damp	White, Omnidirectional	
			12399	LED16DA212/830	120	6	5.28	1600		3000	80	100W	25,000	Yes		Damp	White, Omnidirectional	
			92498	LED16DA21827GU24	120	6	5.43	1600		2700	80	100W	25,000	Yes		Damp	White, Omnidirectional	
			MED	16	73376	LED16A30/100/827	120	6	5.31	360/1400/900		2700	80	30/70/100	25,000	-	★	Damp
92118	LED16A30/100/5KB	120		3	5.31	360/1400/900		5000	80	30/70/100	25,000	-	★		White, 3-Way			
17	16113	LED17DA21/827		120	6	5.28	1600		2700	78	100W	15,000	Yes		Damp	White, Semi-Omni		
22	73378	LED22A50/150/827		120	6	5.31	700/2155/1600		2700	80	50/100/150	25,000	-		Damp	White, 3-Way		
			92120	LED22A50/150/5KB	120	3	5.31	700/2155/1600		5000	80	50/100/150	25,000	-			White, 3-Way	

Get more information at
GELighting.com/ThinkLED

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a "★" are not ENERGY STAR® certified.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

Notes: 1) Product descriptions ending in "7TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.



Product is compliant with material restriction requirements of RoHS

ENERGY STAR® is a registered U.S. mark



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

63563 (Rev 02/27/17)