.60 in (117 mm)

.23 in

 $(5.8 \, \text{mm})$ profile

2.86 in (73 mm)

Shown actual size: Ariadni dimmer and 1-gang Fassada wallplate in White (WH).

Product family features

- Matches existing switches
- · Toggle-style switch turns light on to level set by slider
- · Slide adjusts light to your favorite level
- · eco-dim_® model available
- 1000W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Fassada® and Stainless Steel wallplates only available separately
- · Custom engraving available for wallplates, see pg. 155

Control types

- Single-pole (one location)
- 3-way or 4-way (two or more locations)

Direct load type compatibility

- Incandescent/halogen lighting
- Magnetic low-voltage lighting
- Fluorescent lighting
- LED lighting
- Ceiling fans
- ★ Ceiling fan/lights

Load type requiring load interface

- ☐ Electronic low-voltage lighting
- Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

Available finishes

Use **BOLD** color code in model number (Example: AY-600P-BL) Gloss finishes*















BR Brown

<u>BL</u> Black



<u>**SS**</u> Stainless Steel

^{*}Coordinating wallplates only available separately. For wallplate information, see pg. 166. Stainless Steel wallplate includes black plastic trim/adapter, visible from side. Match with separate Black (BL) controls.

Dimmers

Dimmers



- Toggle turns on/off
- · Slide up to brighten; down to dim
- eco-dim_® model guarantees at least 15% energy savings compared to a standard switch

Dimmers with locator light



- Toggle turns lights on/off
- · Slide up to brighten; down to dim
- · Includes amber locator light
- Not available in black

Fan and fan/light controls

Fan controls



- Toggle turns fan on/off
- · Slide up to increase speed; down to decrease
- 3-quiet fan speeds for increased comfort
- · For use with only one ceiling paddle fan
- · Quiet 3-speed designed to prevent motor hum

Fan/light controls



Fan control (left)


- Slide up to on/increase fan speed; down to decrease fan speed/off
- 3-quiet fan speeds for increased comfort
- · For use with only one ceiling paddle fan
- · Quiet 3-speed designed to prevent motor hum

Dimmer (right)

- Toggle turns light on/off
- · Slide up to brighten; down to dim


Connections overview

Load connections*

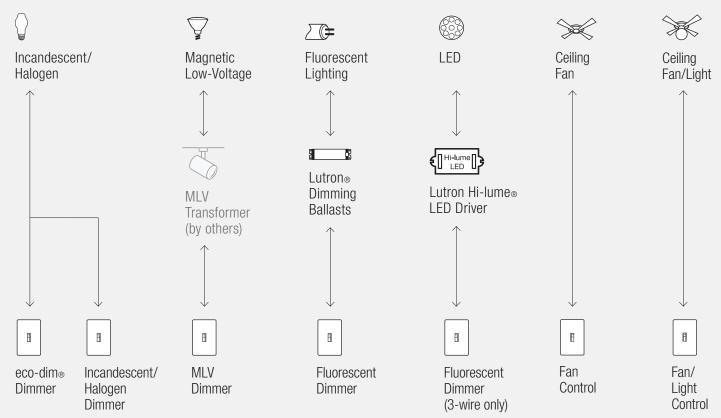

Control types (for 2 or more locations)

Dim from one location, switch from the others



For more information on ballasts, visit **www.lutron.com/ballasts**. For more information on LED drivers, visit **www.lutron.com/LED**.

*For illustration purposes only. Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

Preset dimmers

Single-pole	AY-600P- CC 3
120V 600W	
Single-pole	AY-10P- CC 3
120V 1000W	
3-way	AY-603P- CC 3
120V 600W	
3-way	AY-103P- CC 3
120V 1000W	

Preset dimmers with locator light

Single-pole	AY-600PNL- <u>CC</u> 3
120V 600W	
Single-pole	AY-10PNL- <u>CC</u> 3
1000W	
3-way	AY-603PNL- <u>CC</u> 3
120V 600W	
3-way	AY-103PNL- <u>CC</u> 3
120V 1000W	

eco-dim_® preset dimmer

3-way/single-pole	AY-603PG- EE 2
120V 600W	

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

Preset dimmers

Single-pole	AYLV-600P- CC ³
120V 600VA (450W)	
3-way	AYLV-603P- CC ³
120V 600VA (450W)	

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

<u>CC</u>³: Gloss color codes, see pg. 125

EE2: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)

(Wallplates not included, order separately, see pg. 168)

Dimmer, fan and fan/light control model numbers

Z 3-wire fluorescent dimmers*

Preset dimmers

3-way/single-pole	AYF-103P- CC 3
120V 8A	
3-way/single-pole	AYF-103P-277- <u>CC</u> 3
277V 6A	

For use with Hi-lume, Hi-lume, Compact SE, Hi-lume, 3D, Eco-10, EcoSystem, ballasts.

Also compatible with Hi-lume_® LED driver.

No derating required if ganged.

Adjustable low-end trim.

Preset dimmers

3-way/single-pole	AYF-103P- CC 3
120V 8A	
3-way/single-pole	AYF-103P-277- CC 3
277V 6A	

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers,

visit www.lutron.com/HilumeLED.

No derating required if ganged.

Adjustable low-end trim.

¥ Fan control

Fan control—quiet 3-speed

3-way/single-pole	
120V 1.5A	AYFSQ-F- <u>CC</u> ³

★ Fan/light control

Fan control and dimmer—quiet 3-speed

Single-pole fan control	AY2-LFSQ- \overline{CC}^3
120V 1.5A (left)	
Single-pole dimmer 120V 300W	
incandescent/halogen (right)	

All models must be derated if ganged unless otherwise noted, see pg. 170. For more information on ballasts, visit www.lutron.com/ballasts.

*Requires neutral wire connection.