

# Technical Information Bulletin

## DESIGN LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67914  
 Description: P38HO/27W/30K/25/120-277/STD  
 UPC: 69549679146  
 Case quantity: 10/50


### PHYSICAL DATA

Base: E26  
 Type: PAR38

### PERFORMANCE DATA

Watts (W): 27  
 Lamp volts (VAC): 120-277  
 Colour temperature (K)<sup>1</sup>: 3 000  
 Life L70 (hrs): 50 000  
 Lumens (lm)<sup>2</sup>: 3 000  
 Lumens per watt (lm/W): 111  
 CRI: 80  
 Beam angle (°): 25  
 Power factor: >0.9  
 Operating temperature range: -25°C-45°C  
 Center Beam Candlepower: 7 893

<sup>1</sup> Typical colour temperature range: +/- 5 %  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

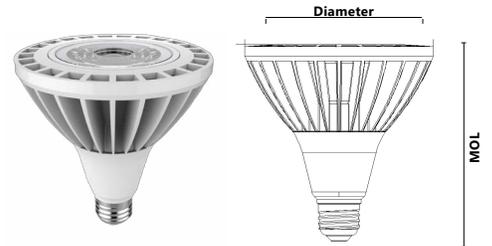

MOL: 5 1/8 in. (130 mm)

Dia.: 4 23/32 in. (120 mm)

### COMPATIBLE DIMMERS

Cooper	AAL06, RRD-6NA
Leviton	IPL06, 6674, DDMX1, DSL06-1LZ, IPE04-1LZ
Lutron	AYCL-253P, DVCL-153P, CTCL-153P, DVCL-253P, DVRP-253P, DVRP-253-WH, MACL-153P, PD-6WCL, PD-5NE, RRD-6NA-WH, SELV-300P



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.