


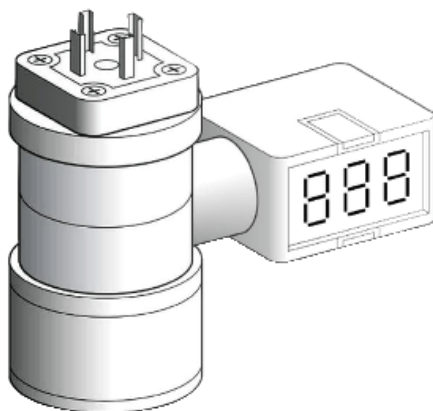

Main

Accessory / separate part type	Display
Display type	Digital display
Operating position	Any position
Product compatibility	XMLE analogue pressure sensors 0.00...1450.38 psi (0...100 bar) EN 175301-803-A (ex DIN43650) XMLP analogue pressure sensors EN 175301-803-A (ex DIN43650)

Complementary

Net weight	0.22 lb(US) (0.1 kg)
Height	2.60 in (66 mm)
Depth	1.57 in (40 mm)
Width	3.62 in (92 mm)

Environment

Protective treatment	TC
IP degree of protection	IP65 conforming to EN/IEC 60529
Vibration resistance	35 gn 60...2000 Hz) 5 gn 25...200 Hz)
Ambient air temperature for operation	5...176 °F (-15...80 °C)
Standards	CE EN 50081 EN 50082
Product certifications	CSA UL

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4.30 oz (122 g)
Package 1 Height	1.77 in (4.5 cm)
Package 1 width	4.53 in (11.5 cm)
Package 1 Length	3.54 in (9 cm)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

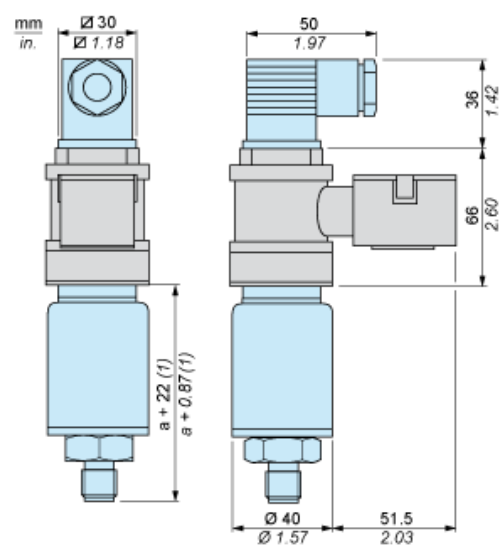

(1) $a = 75$