

**FM-MS120-LED**

DESIGNER SERIES FLUSH MOUNT



NAME:

TYPE:

DATE:

NOTES:

**SPECIFICATIONS**

WIRING:	Installs easily in traditional junction boxes ( 3" or 4" ).
HOUSING DETAILS:	This flush mount unit uses metal housing. The Azure 12" is available with or without the motion sensor. The motion sensor is a microwave sensor with a range up to 15 feet (4.5m), and a time delay of 5 minutes. Sensing no movement within that time period, the light will shut off automatically.
OPTICS:	LED technology delivers 1500 lumens (12" version ) and 2000 lumens (16" version).
ELECTRICAL:	Integrated LEDs are direct-AC with no external driver. For usage in interior ceiling or wall installations in residential or commercial applications.  Ambient operating temperature: -40°C (-40°F) to +50°C (+122°F).  Certifications: ETL and Energy Star listed to U.S. and Canadian safety standards, as well as DAMP LOCATIONS rated.
LENS:	White decorative acrylic frosted lens provides an even light distribution.

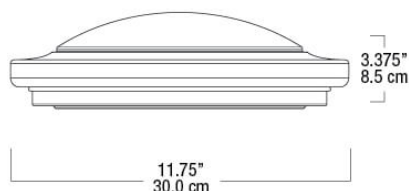
COLOR TEMPERATURE:	3K - 4K
OPERATING TEMPERATURE:	-20°C + 50°C
CRI:	80+
LUMEN OUTPUT:	1500 lumens
DIMMABLE:	No
WATTS:	20 W
LED LIFE:	50,000 hours
WARRANTY:	5 years
VOLTAGE:	120V
DIAMETER:	11.75" (298.5mm)
HEIGHT:	3.375" (85.7mm)
INTEGRATED MOTION SENSOR:	Yes
MOTION SENSOR DETECTION RANGE:	10'-15' (3m-4.5m)

**APPLICATIONS**

The Azure series of LED flush mount fixtures by NDR offers an affordable and stylish design that will complement a varied assortment of lighting applications. The acrylic diffuser may be easily removed for installation and cleaning. Ideal for interior ceiling or wall installations in residential or commercial applications.

**FM-MS120-LED**

DESIGNER SERIES FLUSH MOUNT

**DIMENSIONS**

**RATINGS**

**ORDERING GUIDE**
**AZURE FM-MS120 SERIES**

Motion Sensor Series	Color Temperature	Finish
FM-MS120-20W	3K 3000K/80CRI/20W 4K 4000K/80CRI/20W	WH White

**Notes:** Configure product using **BOLD** options: Ex: **FM-MS120-20W-3K-WH**