

## Main

Range Compatibility	Lexium ILE
Product or Component Type	Adaptation kit
Device short name	GBK
Accessory / separate part category	Adaptation accessory
Product Compatibility	ILE
Accessory / separate part destination	For assembly motor and gearbox
Kit composition	An adaptor plate A shaft end adaptor Screws and bolts for mounting
Gearbox external diameter	2.36 in (60 mm)

## Complementary

Motor flange size	2.60 in (66 mm)
Number of motor stacks	2 3 1
Length	0.75 in (19.1 mm)
Net Weight	0.44 lb(US) (0.2 kg)

## Ordering and shipping details

Category	18283-NEUGART GEARBOXES
Discount Schedule	PC53
GTIN	3606480397769
Returnability	No
Country of origin	DE

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.15 in (8.000 cm)
Package 1 Width	6.38 in (16.200 cm)
Package 1 Length	7.01 in (17.800 cm)
Package 1 Weight	8.89 oz (252.000 g)
Unit Type of Package 2	P06
Number of Units in Package 2	50
Package 2 Height	29.53 in (75.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	56.77 lb(US) (25.750 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

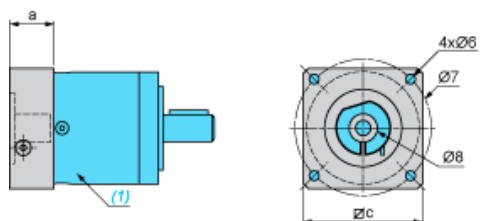

(1) Gearbox

Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a	c	Ø6	Ø7	Ø8 (outer diameter x inner diameter x length)
19.1	60	M4	73.5	14 x 8 x 20

Values in in.

a	c	Ø6	Ø7	Ø8 (outer diameter x inner diameter x length)
0.75	2.36	M4	2.89	0.55 x 0.31 x 0.79