

### WIREMOLD®

## WMPAC Series Wall Boxes



WMPAC525FCW cutaway with white flange and cover.

# Simplified Box Design for In-Wall Power and Data Applications

WMPAC525, WMPAC526, WMPAC527

The WMPAC Series Wall Boxes offer access to A/V, Power and Data applications in a simplified design for use behind flat-screen TVs. With knockouts for single-gang outlets and conduit, this box is ideal for retrofit or new build applications to provide an organized, recessed space for routing excess cables and for attaching surge protectors/power conditioners. The wall boxes work with a variety of Chief wall mounts, giving a clean installation and superior user experience.

### Features & Benefits

- Multiple Depth Compatibility: Easily change box depth for 3.5" or 2.5" stud bays (89 or 64 mm) with breakaway edges.
- Flexible Mounting: Stud mountable and can be mounted to drywall with the flange configurations.
- Easy Knockouts: Knockouts around box for single-gang outlets and 1-1/4", 1" & ½" conduit to meet specific needs on site. Cover knockouts for cable routing, ventilation and tamper proof security.
- Simple Design: Black or white flanges and covers, paintable to blend with any environment.
- Equipment Mounting: Enclosure UL 2416 listed for installation of AV, IT & Communication Technology Equipment, so it is rated to store a variety of AV components.
- Integrated Cable Management: Box features integrated universal zip tie anchor points for cable management.
- Compatible with Chief wall mounts: Works seemlessly with the PST, PRO, MSR, MTR, MWH, MWR, PWRm PNR, PDR, Thinstall and FUSION wall mounts.
- Lever Lock™ Mounting System: Optional mounting brackets and Lever Lock plate enables mounting of small AV equipment within the box.



**Easy Knockouts** 



**Zip Tie Anchor Points** 



**Break Away Edges** 



Drywall or Stud Mountable

## **Vertical Markets**

- Commercial
- Education
- Healthcare

Hospitality

- Entertainment
- Retail

## Compliance



cULus Listed, Audio/Video, Information and Communication Technology Equipment Cabinet, Enclosure and Rack Systems, File Number E309432, Guide NWIN






## WMPAC525 Series Wall Box Ordering Information

#### Catalog No./Item


#### **Description / Specifications**





**In-Wall Box** – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center or 2" x 4" -25ga (minimum) steel studs. The box has a total of five (5) 1-gang knockout locations for mounting AC outlets and eleven (11) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays.


**Country of Origin: China** 















Ø 0.88" [22.2mm] Trade Conduit Size 1/2"






### WMPAC525 Series Wall Box Ordering Information

#### Catalog No./Item


#### **Description / Specifications**




In-Wall Box with Flange – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum ½" thickness drywall surface. The box has a total of five (5) 1-gang knockout locations for mounting AC outlets and eleven (11) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange in either black or white (W).

#### **Country of Origin: China**


## WMPAC525F/FW Series Wall Box Dimensions: 9" x 14.25" x 3.9"







6.08

[154.3mm]





Ø 0.88"








## WMPAC525 Series Wall Box Ordering Information

#### Catalog No./Item

#### **Description / Specifications**


WMPAC525FC WMPAC525FCW




In-Wall Box with Flange and Cover – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum ½" thickness drywall surface. The box has a total of five (5) 1-gang knockout locations for mounting AC outlets and eleven (11) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange and cover in either black or white (W).

**Country of Origin: China** 






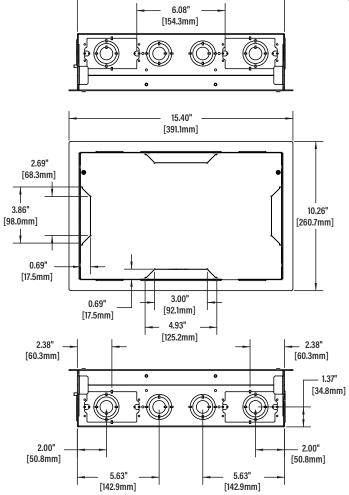

14.25"

[362.0mm]

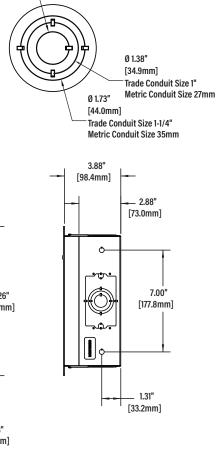


Ø 0.88"
[22.2mm]
Trade Conduit Size 1/2"
Metric Conduit Size 16mm

## WMPAC525 Series Wall Box Accessories Ordering Information

#### Catalog No./Item


#### **Description / Specifications**






Lever Lock™ Plate for WMPAC525 – Enables the attachment of small device equipment inside the WMPAC525 series wall box. Mounting brackets can be installed alongside the inside of the enclosure in two different adapter locations with the tool-less Lever Lock plate slotting into the brackets. There are four levels to the bracket, accommodating different height equipment and the ability to add layers within the box..

#### Country of Origin: China




WMPAC525CVR-KIT WMPAC525CVRWKIT



Cover Kit for WMPAC525 – This product is available in either black or white (W).

**Country of Origin: USA** 


WMPAC525F-KIT WMPAC525FW-KIT



Flange Kit for WMPAC525 – This product is available in either black or white (W).

**Country of Origin: USA** 

WMPAC525P2-KIT



2-Plug In-Wall Power Kit for WMPAC525

**Country of Origin: USA** 




## WMPAC526 Series Wall Box Ordering Information

#### Catalog No./Item

**La legrand**®


#### **Description / Specifications**





In-Wall Box – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center or 2" x 4" -25ga (minimum) steel studs. The box has a total of eight (8) 1-gang knockout locations for mounting AC outlets and sixteen (16) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays.


**Country of Origin: China** 


## WMPAC525 Series Wall Box Dimensions: 14.25" x 14.25" x 3.9"

















## WMPAC526 Series Wall Box Ordering Information

#### Catalog No./Item


#### **Description / Specifications**





In-Wall Box with Flange – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum ½" thickness drywall surface. The box has a total of eight (8) 1-gang knockout locations for mounting AC outlets and sixteen (16) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange in either black or white (W).


#### **Country of Origin: China**

## WMPAC526F/FW Series Wall Box Dimensions: 14.25" x 14.25" x 3.9"




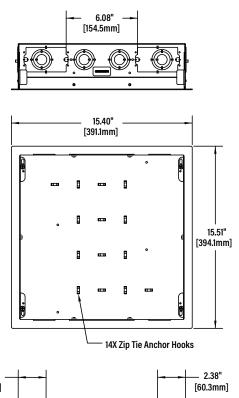





Ø 0.88"






## WMPAC526 Series Wall Box Ordering Information

#### Catalog No./Item

#### **Description / Specifications**





In-Wall Box with Flange and Cover – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum ½" thickness drywall surface. The box has a total of eight (8) 1-gang knockout locations for mounting AC outlets and sixteen (16) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange and cover in either black or white (W).


### **Country of Origin: China**

14.25" [362.0mm]






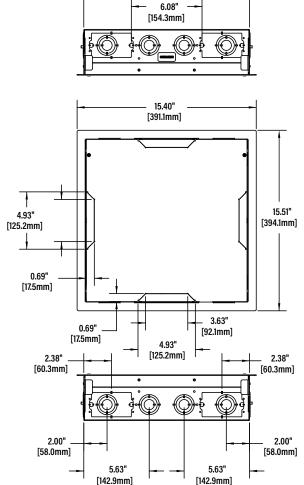




Ø 0.88"


3.88" [98.4mm]



## WMPAC526 Series Wall Box Accessories Ordering Information

#### Catalog No./Item






#### **Description / Specifications**

Lever Lock™ Plate for WMPAC526 -Enables the attachment of small device equipment inside the WMPAC526 series wall box. Mounting brackets can be installed alongside the inside of the enclosure with the tool-less Lever Lock plate slotting into the brackets. There are four levels to the bracket, accommodating different height equipment and the ability to add layers within the box.

Country of Origin: China

#### WMPAC526CVR-KIT WMPAC526CVRWKIT



Cover Kit for WMPAC525 - This product is available in either black or white (W).

**Country of Origin: USA** 


#### WMPAC526P4-KIT



4-Plug In-Wall Power Kit for WMPAC526

**Country of Origin: USA** 


#### WMPAC526F-KIT WMPAC526FW-KIT



Flange Kit for WMPAC526 - This product is available in either black or white (W).

**Country of Origin: USA** 


#### WMPAC526P6-KIT



6-Plug In-Wall Power Kit for WMPAC526

**Country of Origin: USA** 

#### WMPAC526P2-KIT



2-Plug In-Wall Power Kit for WMPAC526


**Country of Origin: USA** 



## WMPAC527FL Series Large In-Wall Box Ordering Information


#### Catalog No./Item

#### **Description / Specifications**




**Large In-Wall Box** – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum  $\frac{1}{2}$ " thickness drywall surface. The box has a total of four (4) 1-gang knockout locations for mounting AC outlets and eight (8) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays.

**Country of Origin: China** 



## WMPAC527FL Series Large In-Wall Box Dimensions: 14.25" x 22" LL

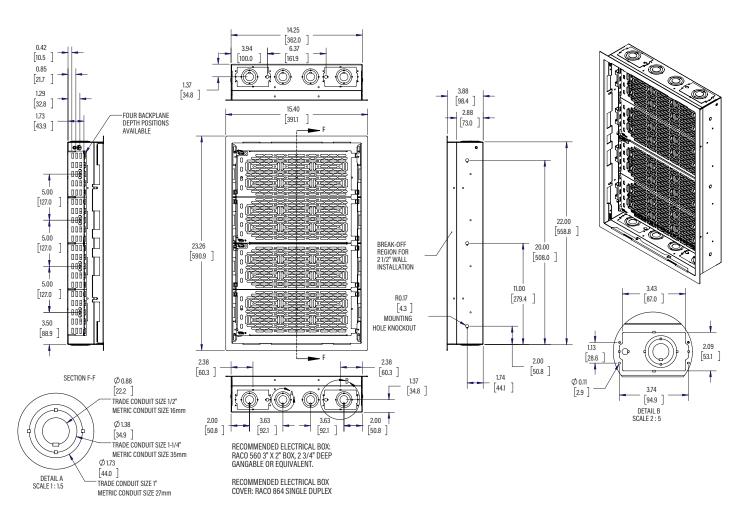




## WMPAC527LF Series Large In-Wall Box Ordering Information

#### Catalog No./Item






Large In-Wall Box with Flange - Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum 1/2" thickness drywall surface. The box has a total of four (4) 1-gang knockout locations for mounting AC outlets and eight (8) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange in either black or white (W).

Country of Origin: China

## WMPAC527LF/LFW Series Large In-Wall Box Dimensions: 14.25" x 22"

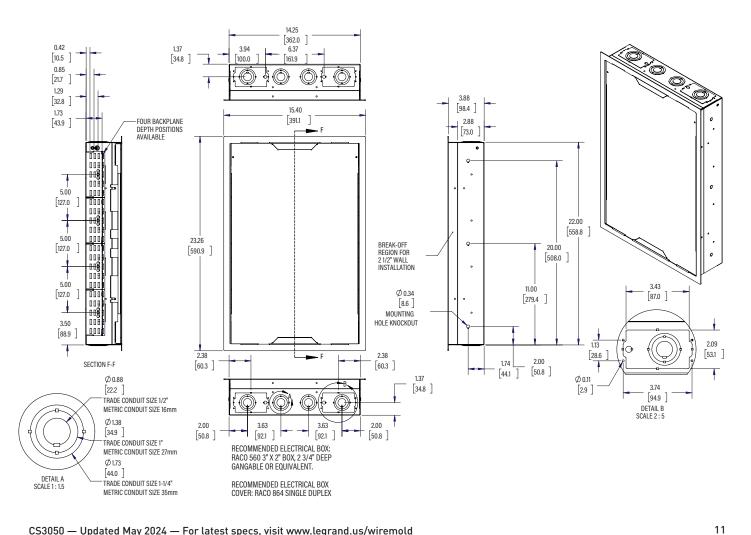




## WMPAC527LFC Series Large In-Wall Box Ordering Information

#### Catalog No./Item


#### **Description / Specifications**

#### WMPAC527LFC WMPAC527LFCW




Large In-Wall Box with Flange and Cover – Designed to be mounted to a 2" x 4" [51mm x 102mm] wood stud wall 16" on center, a 2" x 4" -25ga (minimum) steel studs, or to a minimum ½" thickness drywall surface. The box has a total of eight (8) 1-gang knockout locations for mounting AC outlets and sixteen (16) trade size conduit knockouts for additional cabling needs. The breakaway edges allow the box's depth to be easily changed in the field for 3.5" or 2.5" stud bays. This configuration includes a paintable flange and cover in either black or white (W).

### **Country of Origin: China**



## WMPAC527FC/FCW Series Large In-Wall Box Dimensions: 14.25" x 22"

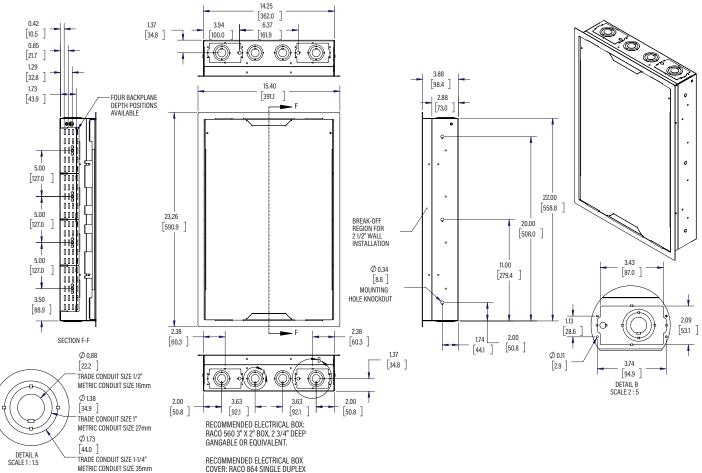


## WMPAC527 Series Wall Box Accessories Ordering Information

#### Catalog No./Item

**Description / Specifications** 


## WMPAC527CVR-KIT WMPAC527CVRWKIT



Cover Kit for WMPAC527 – This product is available in either black or white (W).

**Country of Origin: USA** 


#### WMPAC527P6-KIT



6-Plug In-Wall Power Kit for WMPAC527

**Country of Origin: USA** 


## WMPAC527F-KIT WMPAC527FW-KIT



**Flange Kit for WMPAC527** – This product is available in either black or white (W).

**Country of Origin: USA** 

### WMPAC527P4-KIT



4-Plug In-Wall Power Kit for WMPAC527

**Country of Origin: USA** 



## WIREMOLD® WMPAC Series Wall Boxes



#### **Electrical Wiring Systems**

60 Woodlawn Street West Hartford, CT 06110 1-877-295-3472 www.legrand.us

#### Canada

1-844-977-3783 www.legrand.ca