

VTR800-CCT

Vapor tight flush mount light



NAME:

TYPE:

DATE:

NOTES:

SPECIFICATIONS

| | |
|------------------|---|
| WIRING: | Hardwire only. Installs easily to ceiling or wall using the screw point tabs on the outside of the housing. Supply wires must be brought into the housing using PVC or metal conduit only. |
| HOUSING DETAILS: | The vapor tight housing is made of durable PVC and the front lens is metal dipped in plastic coating with all electrical components 100% sealed inside the front lens. The silicone seal on the lens and the gasket around the edge of the housing provides a full wet location rating (IP67). The housing offers 4 knockout points for PVC or metal conduit piping to run the supply wires to the fixture. 2x ½" and 2x ¾" knockouts |
| OPTICS: | Offered with an acrylic frosted diffuser lens and LED technology to distribute light and optimize delivered high level of lumens. |
| ELECTRICAL: | Easily connected to a 120-347V power supply via provided UL recognized wide range voltage driver. 0-10V dimmable WET LOCATIONS rated – IP67 Extreme weather rating: -40°F to 104°F (-40°C to 40°C). Certifications: This product is cETLus, DLC 5.1 listed and has NDF rating for use in the food processing industry in the USA and Canada. Corrosion resistant materials |
| LENS: | The BOA Series has a frosted diffuser providing a uniform and widespread illumination. |

| | |
|---------------------------|------------------------------|
| COLOR TEMPERATURE: | 35K - 4K - 5K selectable |
| OPERATING TEMPERATURE: | -40°F / 104°F (-40°C / 40°C) |
| LUMEN OUTPUT: | 6900 lumens |
| DIMMABLE: | Yes |
| WATTS: | 55W |
| LED LIFE: | 50,000 hours |
| WARRANTY: | 5 years |
| VOLTAGE: | 120-347V |
| DIAMETER: | 8.27" (21 cm) |
| HEIGHT: | 5.5" (14 cm) |
| INTEGRATED MOTION SENSOR: | No |


APPLICATIONS

The Boa vapor tight flush mount is ideal for many indoor and outdoor applications including stairwells, walk-in refrigerators, elevator shafts, maintenance areas, tunnels, poultry and hog buildings, agricultural, commercial and industrial facilities, warehouses, marina docks, multi-level parking lots, laundry rooms and many more.

VTR800-CCT

Vapor tight flush mount light

DIMENSIONS

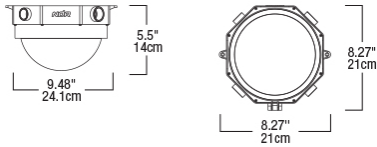

RATINGS



ORDERING GUIDE

BOA VAPOR TIGHT FLUSH MOUNT SERIES

| Series | Selectable Color Temperature | Finish |
|--------|--|---------|
| VTR800 | CCT 3500K-4000K-5000K | GR Grey |
| Notes: | Configure product using BOLD options: Ex: VTR800-CCT-GR | |