


# URGQPLCJ8

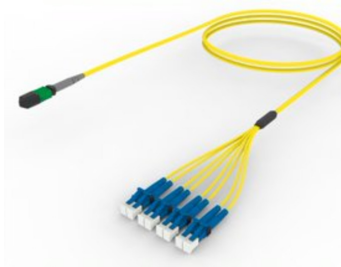

Ultra Low Loss Singlemode MPO8 Unpinned to LC 8-Fiber Low Smoke Zero Halogen Array Cord

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Gray
Color, boot B	Blue
Color, connector A	Green
Color, connector B	Blue
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC
Interface, Connector B	LC/UPC
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8

## Dimensions

Breakout Length	33 in
Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	10 – 999

# URGQPLCJ8

## Ordering Tree

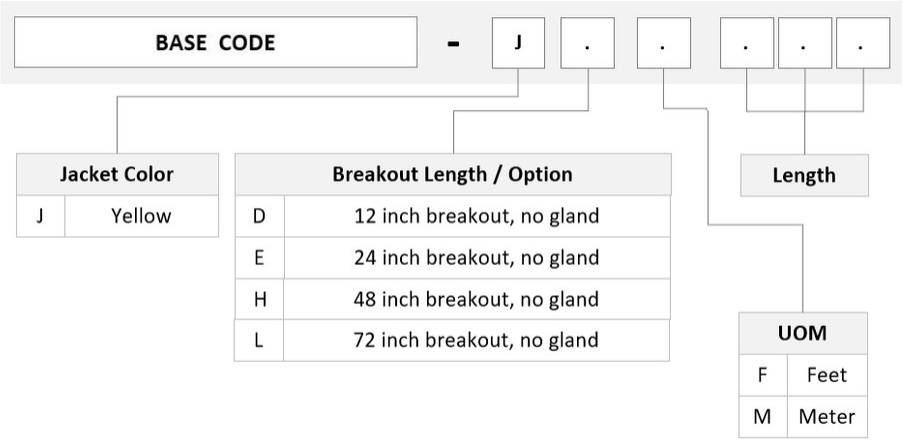

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Singlemode  
**Fiber Type** G.657.A2, TeraSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Indoor | Low Smoke Zero Halogen (LSZH)

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted



# URGQPLCJ8

---

## Included Products

- |                      |   |   |
|----------------------|---|---|
| 760237972            | – | Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12 |
| N-012-MP-8G1-F30YL/D |   | fiber   |
| 860637434            | – | TeraSPEED® Elite LC Connector for 1.6 mm Fiber, single-mode     |
| 860637706            | – | MPO8, ULTRA LOW LOSS, FEMALE, SM, GREEN, 3mm                    |