


URVQPLCJ8

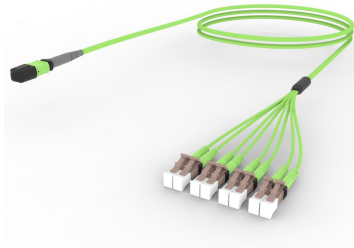

Ultra Low Loss OM5 MPO8 Unpinned to LC 8-Fiber Low Smoke Zero Halogen Array Cord

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Gray
Color, boot B	Lime green
Color, connector A	Lime green
Color, connector B	Beige
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Lime green
Interface, Connector A	MPO-08/UPC
Interface, Connector B	LC/UPC
Jacket Color	Lime green
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8

Dimensions

Breakout Length	33 in
Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

URVQPLCJ8

Ordering Tree

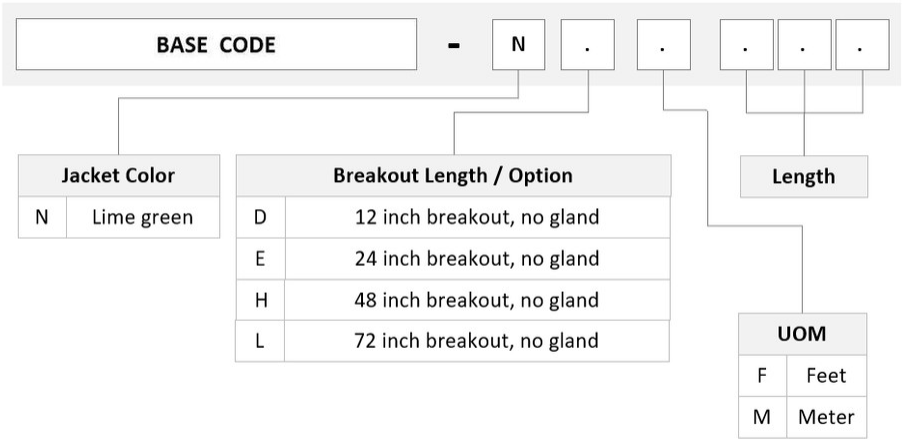

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode
Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted



URVQPLCJ8

Included Products

- | | | |
|---------------------|---|--|
| 760229039 | – | LazrSPEED® Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12 |
| N-012-MP-5G-F30LM/D | | fiber |
| 860633311 | – | MPO8, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm |
| 860649627 | – | LC/UPC Connector, Multimode, Beige, Short Boot |