

Product Environmental Profile

Evolution™ 4ATC Prewired Series Poke-Thru Devices



LEGRAND'S ENVIRONMENTAL COMMITMENTS

• **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

• **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

• **Involve the environment in product design and provide informations in compliance with ISO 14025**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

Function	Distribute the power, communications , and audio video services to the open spaces via 2x 20A duplex power receptacles wiring accessories for 20 years. (other outlets can be added separately)
Reference Product	<div style="text-align: center;">  </div> <p style="text-align: center;">Cat. No. 4ATCP2CRGY</p> <p style="text-align: center;">Prewired Poke-Thru Assembly</p>



The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

PRODUCTS CONCERNED

The environmental data is representative of the following products (see extrapolation rule at the end of the document):

- **4ATCP2CR series:** 4ATCP2CRBK, 4ATCP2CRBS, 4ATCP2CRGY, 4ATCP2CRNK, 4ATCP2CRBZ, 4ATCP2CRAL
- **4ATCP2R series:** 4ATCP2RBK, 4ATCP2RBS, 4ATCP2RGY, 4ATCP2RNL, 4ATCP2RBZ, 4ATCP2RAL
- **4ATCP4R series:** 4ATCP4RBK, 4ATCP4RBS, 4ATCP4RGY, 4ATCP4RNL, 4ATCP4RBZ, 4ATCP4RAL

Product Environmental Profile

Evolution™ 4ATC Prewired Series Poke-Thru Devices



■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

Total weight of Reference Product		132.54oz (3757.4g) (with unit packaging)			
Plastics as % of weight		Metals as % of weight		Other as % of weight	
PVC	2.7 %	Steel	37.5 %	Intumescent materials	7.8 %
Other plastics	1.0 %	Aluminium	6.8 %		
PA	< 0.1 %	Copper alloys	1.4 %	Packaging as % of weight	
PU	< 0.1 %	Zamac	1.1 %	Wood	23.3 %
		Other metals	0.9 %	Paper	17.0 %
				PE	0.5 %
Total plastics	3.7 %	Total metals	47.7 %	Total other and packaging	48.6 %

Estimated recycled material content: 31 % by mass.

For 4ATCP4R series, use the table below regarding the ratio of the constituent materials.

Plastics as % of weight		Metals as % of weight		Other as % of weight	
PVC	3.0 %	Steel	36.9 %	Intumescent materials	7.7 %
Other plastics	1.0 %	Aluminium	6.7 %		
PA	< 0.1 %	Copper alloys	2.4 %	Packaging as % of weight	
		Zamak	1.2 %	Wood	23.1 %
		Other metals	0.9 %	Paper	16.9 %
				PE	0.3 %
Total plastics	4.0 %	Total metals	48.1 %	Total other and packaging	47.9 %



■ MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



■ DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gases emissions. The Reference Product is therefore transported by truck from our warehouse to the local point of distribution into the market in North America, over a maximum range distance of 2175 miles [3500km].

Product Environmental Profile

Evolution™ 4ATC Prewired Series Poke-Thru Devices



INSTALLATION

For the installation of the product, the drilling of a hole was taken into account but the add of silicone not provided with the product wasn't taken into account according to the PSR 0003 page 5 paragraph 3.2.



USE

Servicing and maintenance :

Under normal conditions of use, this product requires no servicing or maintenance.

Consumables :

No consumables are necessary to use the Reference Product.



END OF LIFE

Development teams integrate product end-of-life factors in the design phase.

Hazardous waste* contained in the product: no hazardous waste

(*) Hazardous waste as defined by European Commission decision 2000/532/EC.

• Recycling rate:

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 90 %. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:

- metal materials (excluding packaging) : 48.0 %
- plastic materials (excluding packaging) : 3.2 %
- packaging (all types of materials) : 38.8 %



ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from products marketed and used in North America.

For each phase, the following modelling elements were taken in account:

Manufacture	Packaging taken into account. As required by the «PEP ecopassport» programme all transports for the manufacturing of the Reference Product, including materials and components, has been taken in account. The waste generated during manufacturing phase has been taken into account.
Distribution	Transport between the last Group distribution centre and an average delivery to the sales area. 2175 miles [3500km], generic data as defined by the PCR version: PEP-PCR-ed 3-EN-2015 04 02.
Installation	The end-of-life of the packaging is taken into account at this phase
Use	<ul style="list-style-type: none"> • Under normal conditions of use, this type of product requires no servicing or maintenance. • No consumables are necessary to use this type of product. • Product category: PSR0003-ed1.1-EN-2015_10_16-Cable_Management_Solutions §3.2.3.2. Pre-equipped service poles, service posts and multi-outlet extensions. • Use scenario : non-continuous operation (30% of the time) for 20 years at 30% of rated load. This modelling duration does not constitute a minimum durability requirement. • Energy model: Electricity Mix; United States - 2009.
End of life	The default end of life scenario maximizing the environmental impacts
Software and database used	EIME V5 and its database «CODDE-2015-04» and the indicators defined in the PCR ed3 in alignment with the EN 15804 standard.

Product Environmental Profile

Evolution™ 4ATC Prewired Series Poke-Thru Devices




SELECTION OF ENVIRONMENTAL IMPACTS

	Total for Life cycle		Raw material and manufacture		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
Global warming	1.83E+01	kgCO2 eq.	1.21E+01	66%	6.54E-01	4%	3.62E-01	2%	5.09E+00	28%	1.65E-01	< 1%
Ozone depletion	1.93E-06	kgCFC-11 eq.	1.83E-06	95%	1.33E-09	< 1%	5.44E-09	< 1%	9.24E-08	5%	2.02E-09	< 1%
Acidification of soils and water	5.26E-02	kgSO2 eq.	4.34E-02	83%	2.94E-03	6%	6.64E-04	1%	4.88E-03	9%	6.79E-04	1%
Water eutrophication	8.14E-03	kg(P04)3- eq.	4.81E-03	59%	6.76E-04	8%	3.34E-04	4%	1.29E-03	16%	1.03E-03	13%
Photochemical ozone formation	4.83E-03	kgC2H4 eq.	3.72E-03	77%	2.09E-04	4%	7.08E-05	1%	7.81E-04	16%	5.15E-05	1%
Depletion of abiotic resources - elements	1.59E-04	kgSb eq.	1.59E-04	100%	2.62E-08	< 1%	6.34E-09	< 1%	5.01E-08	< 1%	8.07E-09	< 1%
Total use of primary energy	5.20E+02	MJ	4.36E+02	84%	8.77E+00	2%	4.86E+00	< 1%	6.86E+01	13%	1.91E+00	< 1%
Net use of fresh water	1.15E-01	m ³	1.05E-01	92%	5.86E-05	< 1%	5.08E-04	< 1%	9.00E-03	8%	7.37E-05	< 1%
Depletion of abiotic resources - fossil fuels	2.45E+02	MJ	1.47E+02	60%	9.20E+00	4%	5.58E+00	2%	8.06E+01	33%	2.23E+00	< 1%
Water pollution	1.32E+03	m ³	9.13E+02	69%	1.08E+02	8%	2.72E+01	2%	2.51E+02	19%	2.21E+01	2%
Air pollution	2.58E+03	m ³	2.07E+03	80%	2.68E+01	1%	3.06E+01	1%	4.33E+02	17%	1.25E+01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

% ENVIRONMENTAL IMPACT PER LIFE CYCLE STAGE OF REFERENCE PRODUCT

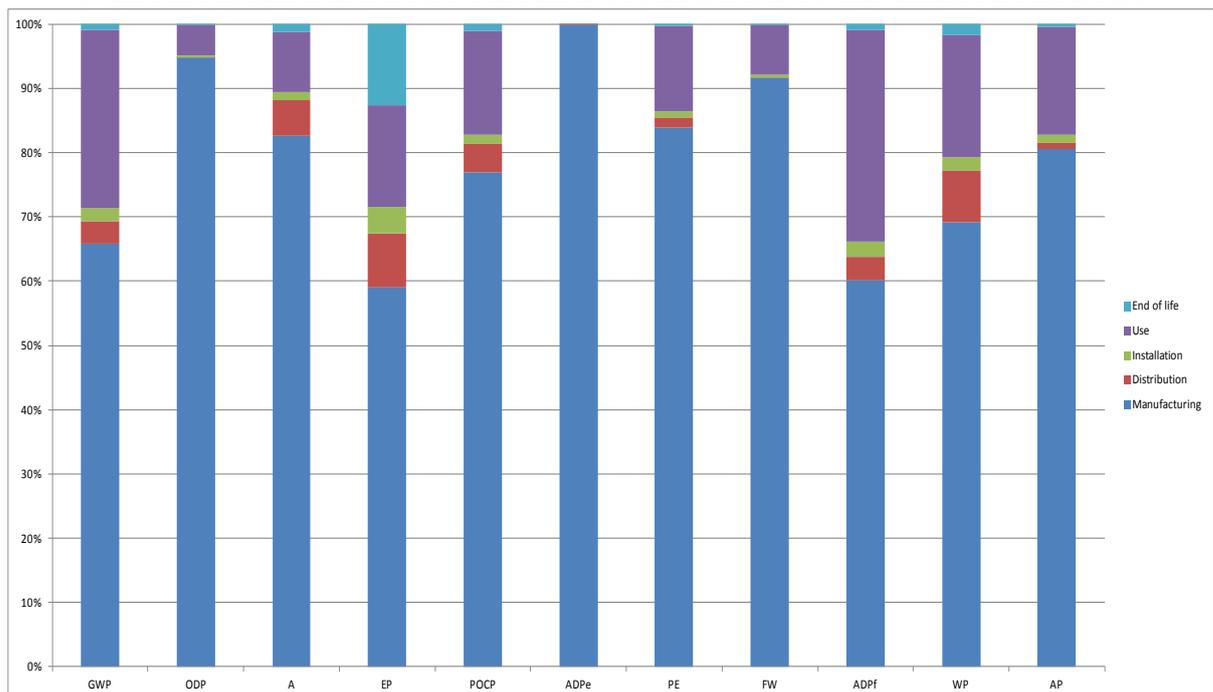

Product Environmental Profile

Evolution™ 4ATC Prewired Series Poke-Thru Devices



The environmental impacts of each phase of the lifecycle are the same for all the different finish painting.

For products covered by the PEP other than the Reference product, the environmental impacts of each phase of the lifecycle are calculated with the following table.

4ATCP2R and 4ATCP2CR are similar products, the controller device for receptacles is not include in the product.

	Manufacturing	Distribution	Installation	Use	End of life
4ATCP2R series	1.0	1.0	1.0	1.0	1.0
4ATCP4R series	1.4	1.0	1.0	2.0	1.0

Registration N°: LGRP-00639-V01.01-EN	Drafting rules: PEP-PCR-ed3-EN-2015 04 02 Supplemented by PSR0003-ed1.1-EN-2015_10_16
Verifier accreditation N°: VH02	Information and reference documents : www.pep-ecopassport.org
Date of issue: 01-2018	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)	
PEP are compliant with XP C08-100-1: 2014 The elements of the present PEP cannot be compared with elements from another program	
Document in compliance with ISO 14025 : 2010: «Environmental labels and declarations. Type III environmental declarations»	
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013	

