

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LPDL™ CHOICE

LED LOW PROFILE DOWNLIGHT

ORDERING INFORMATION

Order code: 68309
Model number: LPDL6R-14A-3CWH/CHOICE
UPC: 69549015876
Case quantity: 18

PHYSICAL DATA

Size in. (mm): 6 7/8 (174.5)
Shape: Round
Finish: White
Lens type: Frosted polycarbonate
Mounting: Recessed
Cable Rating: FT4

PERFORMANCE DATA

Watts (W): 14
Volts (VAC): 120
Colour temperature (K)¹: 2 700 / 3 000 / 4 000
Lumen output (lm)²: 1 000 / 1 100 / 1 100
Lumen per Watts (lm/W): 71 / 78 / 78
CRI: 80+
Life L70 (h)³: 54 000
Beam angle (°): 100
Environment: Damp location
THD (%): <15%
Power factor: >0.9
Frequency (Hz): 60
Operating temp. range: - 20 °C / - 4 °F to 40 °C / 104 °F
Dimmable: Yes

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE ACCESSORIES

Order code	Model number	Type
66822	ACC/MPLATE/6.25IN/HANG.BARS/STD	Mounting plate with hanger bars
64263	ACC/MPLATE/6.25IN/SQR/STD	Square mounting plate
64921	ACC/MPLATE/6.25IN/ADJ/STD	Adjustable mounting plate
66144	ACC/6/VAPOR BARRIER/STD	Vapor barrier extender
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord



5
warranty

**quick
ship**

**LED
fixture**

dimmable

airtight

**damp
location**

**IC
rated**

**ICES
005**

3
CCT TCC
2 700/3 000/4 000 K

ETL
US
Intertek

ENERGY STAR


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS

Brand	Model
COOPER	AAL06
LEVITON	PD-5NE, PD-6WCL, RRD-6NA, DVCL-153P, CTCL-153P, AYCL-253P, DVRP-253, SELV-300P
LUTRON	DDMX1

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


DIMENSIONS

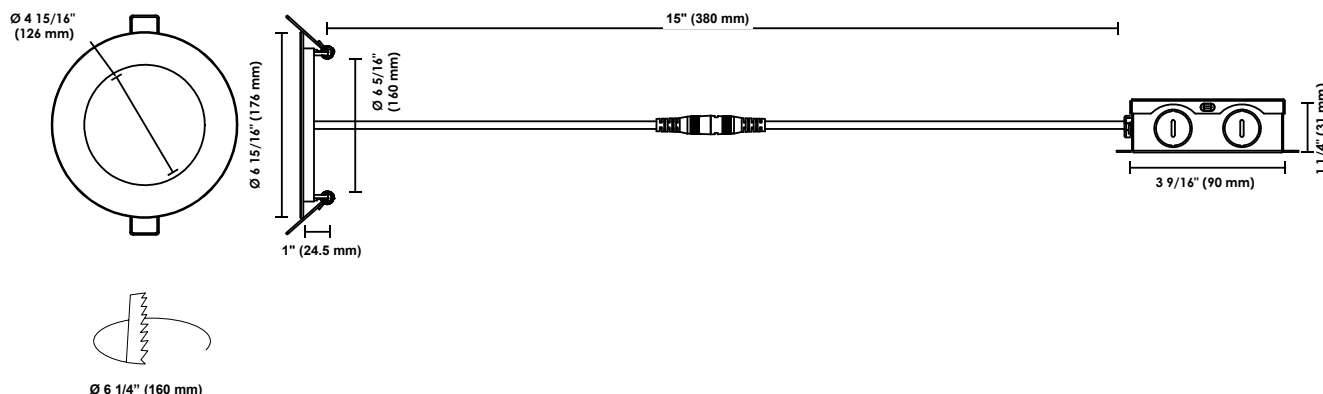

PHOTOMETRIC DATA¹

68309 • LPDL6R/14A/3CWH/CHOICE (30K) • 1 160.3 lm

Polar candela distribution

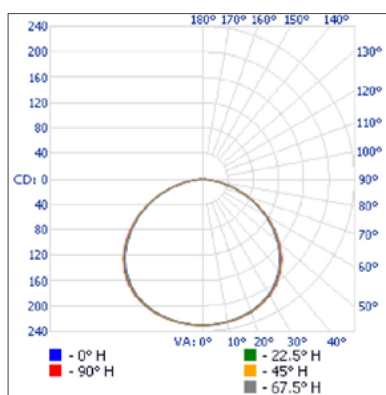

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	311.3	26.8%
0-40	510.9	44%
0-60	906.8	78.2%
60-90	253.5	21.8%
0-90	1 160.3	100%

Illuminance at a distance

Center beam fc	Beam width
1.7'	5.2' 5.2'
3.3'	10.0' 10.1'
5.0'	15.2' 15.3'
6.7'	20.3' 20.6'
8.3'	25.2' 25.5'
10.0'	30.3' 30.7'

Vert. spread: 113.2°
Horiz. spread: 113.8°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.