

Ultra Low Loss (ULL) OM5 MPO12 (Pinned) to LC, Fiber Extension Cable Assembly, 12-Fiber, Low Smoke Zero Halogen

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications

Color, boot A	Black
Color, boot B	Lime green
Color, connector A	Lime green
Color, connector B	Beige
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Lime green
Interface, Connector A	MPO-12/UPC
Interface, Connector B	LC/UPC
Jacket Color	Lime green
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	12


## Dimensions

Breakout Length	33 in
-----------------	-------

# URVMXLCCGD

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

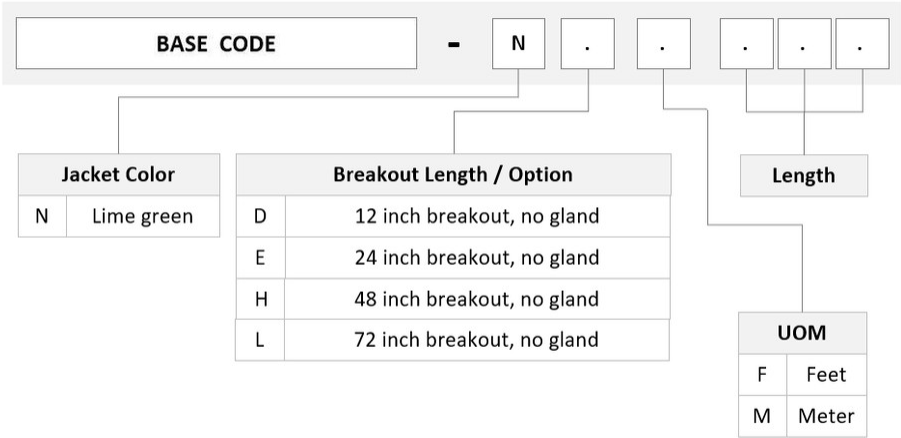

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM5, LazrSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor   Low Smoke Zero Halogen (LSZH)

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted

# URVMXLCDG

---



## Included Products

760229039	–	LazrSPEED® Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12
N-012-MP-5G-F30LM/D		fiber
860617240	–	MPO12, ULTRA LOW LOSS, MALE, OM5, LIME, 3mm
860649627	–	LC/UPC Connector, Multimode, Beige, Short Boot