UQXQPLCJ8



Ultra Low Loss (ULL) OM4 MPO8 (Unpinned) to LC, Fiber Extension Cable Assembly, 8-Fiber, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber array cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot AGrayColor, boot BAquaColor, connector AAquaColor, connector BBeigeConstruction TypeStranded

Fibers per Subunit, quantity 8

Furcation Color Aqua

Interface, Connector A MPO-08/UPC

Interface, Connector B LC/UPC

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 8

Dimensions


Breakout Length 12 in | 24 in | 36 in | 48 in | 60 in | 72 in

COMMSCOPE®

UQXQPLCJ8

Cable Assembly Length Range (m)1-304Cable Assembly Length Range (ft)2-999

Ordering Tree

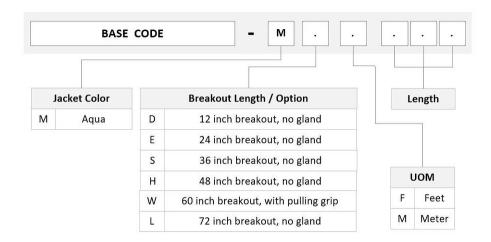

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C to } +60 \,^{\circ}\text{C (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted



UQXQPLCJ8





Included Products

760074997 – LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12

P-012-MP-5K-F30AQ fibe

860633307 - MPO8, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm

860637425 – LC/UPC Connector, Multimode, Beige, Short Boot

