

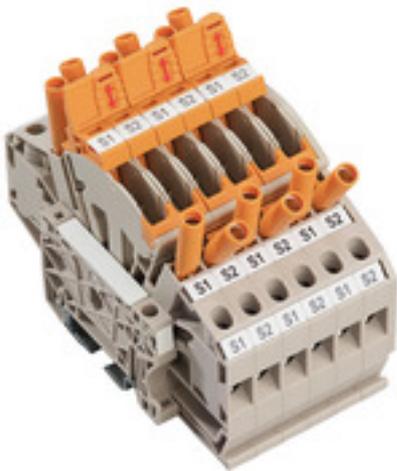
LST_CT_3PHASE_WTTB_OR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Version	Test-disconnect terminal, Screw connection, dark beige, 6 mm ² , 30 A, 500 V, Number of connections: 12, TS 35, V-0, Wemid
Order No.	8000082522
Type	LST_CT_3PHASE_WTTB_OR
GTIN (EAN)	4064675568582
Qty.	1 pièce(s)

LST_CT_3PHASE_WTTB_OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Dimensions and weights

Depth	79 mm	Depth (inches)	3,11 inch
Height	100 mm	Height (inches)	3,937 inch
Width	62,2 mm	Width (inches)	2,449 inch
Net weight	283 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	Wemid	Colour	dark beige
Colour of operational elements	orange	UL 94 flammability rating	V-0

System specifications

End cover plate required	No	Number of potentials	3
Rail	TS 35	PE function	No

Additional technical data

Open sides	closed	Type of mounting	Snap-on
------------	--------	------------------	---------

Conductors for clamping (rated connection)

Blade size	0.8 x 4.0 mm	Clamping range, max.	10 mm ²
Clamping range, min.	0,5 mm ²	Clamping screw	M 3.5
Connection cross-section, stranded, max.	10 mm ²	Connection cross-section, stranded, min.	0,5 mm ²
Connection direction	on side	Gauge to IEC 60947-1	A4
Number of connections	12	Stripping length	12 mm
Tightening torque, max.	1,6 Nm	Tightening torque, min.	0,8 Nm
Type of connection	Screw connection	Wire connection cross section AWG, max.	AWG 8
Wire connection cross section AWG, min.	AWG 22	Wire connection cross section, finely stranded, max.	10 mm ²
Wire connection cross section, finely stranded, min.	0,5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0,5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0,5 mm ²	Wire connection cross-section, solid core, max.	10 mm ²
Wire connection cross-section, solid core, min.	0,5 mm ²		

General

Rail	TS 35	Standards	IEC 60947-7-1
Wire connection cross section AWG, max.	AWG 8	Wire connection cross section AWG, min.	AWG 22

Date de création 26 novembre 2024 14:03:33 CET

Niveau du catalogue 26.11.2024 / Toutes modifications techniques réservées

2

LST_CT_3PHASE_WTTB_OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Caractéristiques techniques

Rating data

Rated cross-section	6 mm ²	Rated voltage	500 V
Rated DC voltage	500 V	Rated current	30 A
Current at maximum wires	30 A	Standards	IEC 60947-7-1
Rated impulse withstand voltage	6 kV	Pollution severity	3
Surge voltage category	III		

Classifications

ETIM 6.0	EC000902	ETIM 7.0	EC000902
ETIM 8.0	EC000902	ETIM 9.0	EC000902
ECLASS 9.0	27-14-11-26	ECLASS 9.1	27-14-11-26
ECLASS 10.0	27-14-11-26	ECLASS 11.0	27-14-11-26
ECLASS 12.0	27-14-11-26	ECLASS 13.0	27-25-01-09
ECLASS 14.0	27-25-01-09		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

User Documentation	DATA SHEET LST_CT_3PHASE_WTTB_OR DE DATA SHEET LST_CT_3PHASE_WTTB_OR EN
Catalogues	Catalogues in PDF-format

Fiche de données

LST_CT_3PHASE_WTTB_OR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Dessins

