


## Washer Splice Kit

- Washer is staked to bolt, holding part stationary during installation
- Fewer parts to handle
- For use with all tray widths and sizes
- Finishes \_\_: **EG, BLE**

**BLE** suffix indicates black zinc finish for this part only

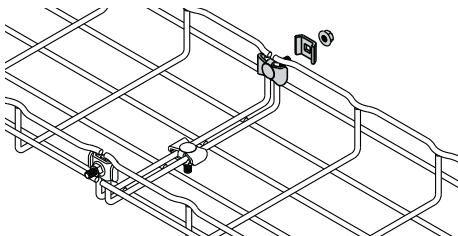

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
<b>WASHER SPL KIT__</b>	Assembly of Staked Washer Stud/Washer & Finned Nut	50	4.5	2.04

**Splicing Chart** (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
<b>2"</b>	NC	NC	4	4	4	4	4	5	5
<b>4"</b>	NM	4	5	6	6	7	7	7	8
<b>6"</b>	NM	NM	NM	6	6	7	7	7	8


NC = Not UL Classified in this size    NM = Flextray is not manufactured in this size

## Splice Hardware Components

- Works with all splicing needs
- For use with all tray widths and sizes
- Components are sold separately
- Finishes \_\_: **EG, BLE-BLO, 304S, 316S**

**FTHDWE 1/4** not available in **BLE**.

**TOP WASHER & BTM WASHER** not available in **BLO**.

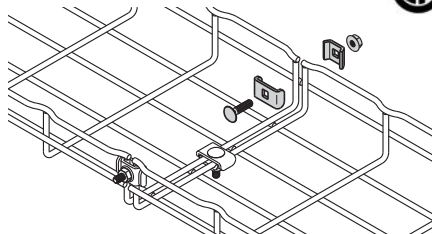

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
<b>FTHDWE 1/4__</b>	1/4" x 1" Carriage Bolt & Finned nut	50	1.2	0.54
<b>TOP WASHER__</b>	1" Square Splice Washer	50	1.4	0.63
<b>BTM WASHER__</b>	1 3/16" Square Splice Washer	50	2.0	0.91



BTM WASHER



FTHDWE1/4



TOP WASHER

**Splicing Chart** (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
<b>2"</b>	NC	NC	4	4	4	4	4	5	5
<b>4"</b>	NM	4	5	6	6	7	7	7	8
<b>6"</b>	NM	NM	NM	6	6	7	7	7	8

NC = Not UL Classified in this size    NM = Flextray is not manufactured in this size

See page 2 for finish and grounding information