M-6097 | 8

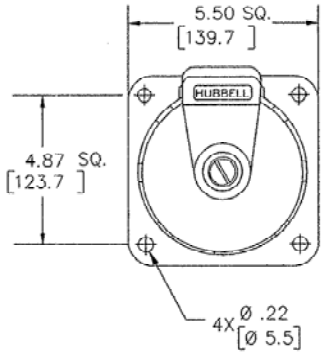

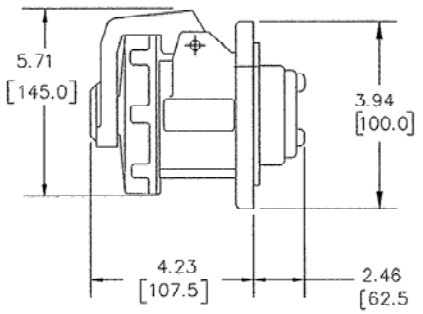

CAT NO.	CONFIGURATION	RATING	HOUSING		CAT. NO.	CONFIGURATION	RATING	HOUSING	
			MATERIAL	COLOR				MATERIAL	COLOR
					HBL5100R7W		100A 3ØY 277/480 VAC	NYLON	RED
					HBL5100R8WDC		100 A 400 VDC	NYLON	RED
					HBL5100R9W		100A 3ØY 120/208 VAC	NYLON	BLUE
HBL5100R5W		100A 3ØY 347/600 VAC	NYLON	BLACK					
HBL5125R6W		125A 220/380VAC 240/415VAC	NYLON	RED					

NOTES: (UNLESS OTHERWISE SPECIFIED

1) TOLERANCES ARE:
DECIMALS ±.03
ANGLES ± 2°

2) DIMENSIONS ARE INCHES
[MILLIMETERS]

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	SEE TABLE	
INTERIOR	THERMOSET	
SLEEVES	BRASS	
SLEEVE INSERT	BERR COPPER	SILVER
TERM. SCRS.	STAIN. STEEL	
COVER	POLYESTER	
COVER SCREWS	BRASS	NICKEL
COVER SPRING	STAIN. STEEL	
GASKET	NEOPRENE	
DISC	POLYCARBONATE	
ARM	POLYESTER	
HINGE PIN	STAIN. STEEL	
HNGE SPR.	STAIN. STEEL	
ASS'Y SCREWS	STAIN. STEEL	

SYM	REVISIONS	APP	DATE
8	ADDED POLARITY TO TO CATALOG # HBL5100R8WDC PER DCN16648 MYA TLS TLS	TLS	5/12/10
7	ADDED CAT. HBL5100R8V0DC PER DCN 16502 SPN TLS	MJM	4/13/10
6	REDRAWN ON CAD WITH CHANGES, ADDED "HOUSING" AND "COMMENTS" COLUMNS, TO TABLE AND NOTES 1& 2, IN TABLE, ADDED "240/415VAC" TO HBL5125R6W AND "A" WAS "AMP" IN LIST OF PARTS, "SEE TABLE" WAS "NYLON" AND "NEOPRENE" WAS "RUBBER". 22 DIM WAS 7/32, AND 4.37[123.7] SQ WAS 4.875/123.82MM SQ; "Ø" WAS "DIA." AND "(XX.X)" WAS "MM". SUPERSEDES DRAWING DATED 5/7/80 PER DCN #12944 JMN	DJP	6/28/06

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
100A & 125A 4 POLE 5 WIRE
PIN & SLEEVE RECEPTACLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
~~FRACTIONS ±1/64~~
DECIMALS ±.03
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY MJK	APP. BY DJP
TR. BY JMN	SCALE NONE
CHK'D BY DJP.	DATE 6/28/06

DIMENSION SHEET FOR CAT. NO. SEE TABLE
REPAIRABLE ☐ NON-REPAIRABLE ☐
B
M-6097
8