

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

EDGE - L1DIP

3 CCT SELECTABLE

Direct / Indirect Lighting

ORDERING INFORMATION

Order code: 68965
Model number: L1DIP-G2-4LS1-3C
UPC: 069549022904
Case quantity: 2

PHYSICAL DATA

Dimensions in. (mm): 48 (1 219.2)
Type: Linear
Lens material: Frosted Acrylic
Frame Material: Aluminum

PERFORMANCE DATA

Watts (W): 40
Volts (VAC): 120-277
Colour temp. (K): 3 000/3 500/4 000
Lumen output (lm): 4 825
Efficiency (lm/W): 121
CRI: 80
Life L70 (h): 54 000
THD (%): 20
Power factor: 0.9
Frequency (Hz): 60
Input current (A): 0.33
Output current (mA): 880
Operating temp. range: -10 °C to 40 °C (14 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



5
yrs
warranty

3
CCT TCC
3 000/3 500/4 000 K

quick
ship

LED
fixture

dimmable


damp
location

Direct / Indirect
Light

ICES
005




DIMENSIONS

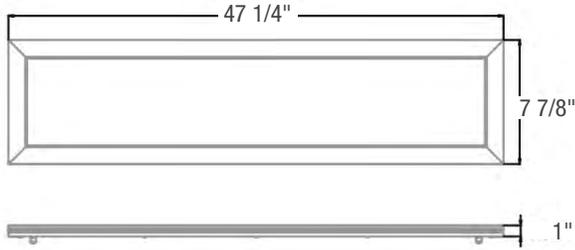

PHOTOMETRIC DATA¹

68965 • L1DIP-G2-4LS1-3C • 3 500 K • 4 825 lm

Polar candela distribution

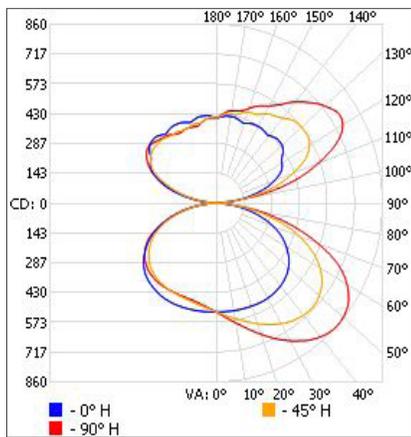

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	445.6	9.6%
0-40	832.8	17.2%
0-60	1 775.3	36.8%
60-90	800.0	16.6%
70-100	417.4	8.6%
90-120	773.2	16%
0-90	2 575.3	53.3%
90-180	2 253.6	46.7%
0-180	4 828.9	100%

Illuminance at a distance

Center beam fc		Beam width	
2.0'	130.7 fc	7.7'	9.2'
4.0'	32.7 fc	15.3'	18.3'
6.0'	14.5 fc	23.0'	27.5'
8.0'	8.2 fc	30.6'	36.6'
10.0'	5.2 fc	38.3'	45.8'

■ Vert. spread: 124.8°
■ Horiz. spread: 132.8°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.