

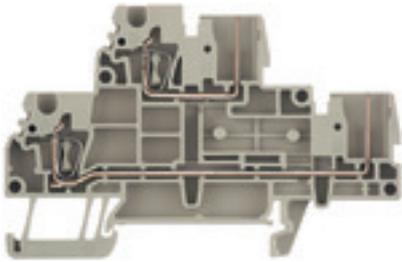
**ZDT 2.5/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Some applications demand for a pluggable, modular solution to be more flexible or to facilitate the installation. Where complete functional units have to be prefabricated or replaced, modular and flexible connection systems are required. Our pluggable terminal blocks can be quickly assembled and are completely factory tested.

**General ordering data**

Version	Z-series, Double-tier terminal, Rated cross-section: 2.5 mm <sup>2</sup> , Tension-clamp connection, dark beige
Order No.	<a href="#">1815150000</a>
Type	ZDT 2.5/2
GTIN (EAN)	4032248340774
Qty.	50 pièce(s)

## ZDT 2.5/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Caractéristiques techniques

## Dimensions and weights

Depth	52 mm	Depth (inches)	2,047 inch
Depth including DIN rail	52,5 mm	Height	80,5 mm
Height (inches)	3,169 inch	Width	5,1 mm
Width (inches)	0,201 inch	Net weight	9,67 g

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

## Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

## System specifications

Version	2 tension-clamp connections - 2 plug-in connections, pluggable	End cover plate required	Yes
Number of potentials	2	Number of levels	2
Number of clamping points per level	4	Levels cross-connected internally	No
Rail	TS 35		

## Additional technical data

Explosion-tested version	No	Open sides	right
Type of mounting	Snap-on		

## CSA rating data

Certificate number (cCSAus)	154685-1460993	Current size C (cCSAus)	20 A
Current size D (cCSAus)	5 A	Voltage size C (cCSAus)	300 V
Voltage size D (cCSAus)	600 V	Wire cross section max. (cCSAusX)	12 AWG
Wire cross section min. (cCSAusX)	26 AWG		

## Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2,5 mm <sup>2</sup>	Connection type, additional connection	pluggable
---	---------------------	--	-----------

## Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm
Clamping range, max.	4 mm <sup>2</sup>
Clamping range, min.	0,13 mm <sup>2</sup>
Connection cross-section, stranded, max.	4 mm <sup>2</sup>
Connection cross-section, stranded, min.	0,5 mm <sup>2</sup>
Connection direction	top
Gauge to IEC 60947-1	A2
Number of connections	4
Stripping length	10 mm

Date de création 26 novembre 2024 13:17:04 CET

Niveau du catalogue 26.11.2024 / Toutes modifications techniques réservées

2

## ZDT 2.5/2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Caractéristiques techniques

Tube length for wire-end ferrule with plastic collar DIN 46228/4	Cross-section for conductor connection	nominal	0,5 mm <sup>2</sup>	
		min.	6 mm	
		max.	10 mm	
	Cross-section for conductor connection	nominal	0,75 mm <sup>2</sup>	
		min.	6 mm	
		max.	12 mm	
	Cross-section for conductor connection	nominal	1 mm <sup>2</sup>	
		min.	6 mm	
		max.	12 mm	
	Cross-section for conductor connection	nominal	1,5 mm <sup>2</sup>	
		min.	8 mm	
		max.	12 mm	
	Cross-section for conductor connection	nominal	2,5 mm <sup>2</sup>	
		min.	8 mm	
		max.	12 mm	
Tube length for wire-end ferrule without plastic collar DIN 46228/1	Cross-section for conductor connection	nominal	0,5 mm <sup>2</sup>	
		nominal	10 mm	
	Cross-section for conductor connection	nominal	0,75 mm <sup>2</sup>	
		nominal	10 mm	
	Cross-section for conductor connection	nominal	1 mm <sup>2</sup>	
		nominal	10 mm	
	Cross-section for conductor connection	nominal	1,5 mm <sup>2</sup>	
		min.	10 mm	
		max.	12 mm	
	Cross-section for conductor connection	nominal	2,5 mm <sup>2</sup>	
		min.	10 mm	
		max.	12 mm	
	Type of connection	Tension-clamp connection		
	Wire connection cross section AWG, max.	AWG 12		
	Wire connection cross section AWG, min.	AWG 26		
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>			
Wire connection cross section, finely stranded, min.	0,5 mm <sup>2</sup>			
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2,5 mm <sup>2</sup>			
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0,5 mm <sup>2</sup>			
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2,5 mm <sup>2</sup>			
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0,5 mm <sup>2</sup>			
Wire connection cross-section, solid core, max.	4 mm <sup>2</sup>			
Wire connection cross-section, solid core, min.	0,5 mm <sup>2</sup>			

### General

Rail	TS 35	Standards	IEC 61984, In accordance with IEC 60947-7-1
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 26

Date de création 26 novembre 2024 13:17:04 CET

## ZDT 2.5/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Caractéristiques techniques

## Rating data

Rated cross-section	2,5 mm <sup>2</sup>	Rated voltage	400 V
Max. voltage of clamp support & plug-gable system	690 V	Rated DC voltage	500 V
Rated current	24 A	Current at maximum wires	24 A
Standards	IEC 61984, In accordance with IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	1,33 mΩ
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	0,77 W
Pollution severity	3		

## UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	12 AWG
Conductor size Factory wiring min. (cURus)	26 AWG	Conductor size Field wiring max. (cURus)	12 AWG
Conductor size Field wiring min. (cURus)	26 AWG	Current size C (cURus)	20 A
Current size D (cURus)	5 A	Voltage size C (cURus)	300 V
Voltage size D (cURus)	600 V		

## Classifications

ETIM 7.0	EC000897	ETIM 8.0	EC000897
ETIM 9.0	EC000897	ECLASS 11.0	27-14-11-20
ECLASS 12.0	27-14-11-20	ECLASS 13.0	27-25-01-17
ECLASS 14.0	27-25-01-17		

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E60693

## ZDT 2.5/2

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Caractéristiques techniques

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">CB Testreport</a> <a href="#">CB Certificate</a> <a href="#">DNV Certificate</a> <a href="#">Declaration of Conformity</a> <a href="#">UKCA declaration of conformity</a> <a href="#">Confirmation of Standards EN 45545-2_2020-10</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

**Fiche de données**

**ZDT 2.5/2**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Dessins**

