

Strata L Slim SL-STRATA-SLIM-BK

Product Finishes:




Specifications:

Voltage: 12V AC
Wattage: 7
Volt Amps: 11
Lumens: 600
Color Temp: 2700k
IP Rating: 67
CRI: 93.5
Light Source: Integrated


Material: Anodized aluminum
Cable Length: 24"
Lux (lx): 14
Candelas (cd): 2839
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
Trees, Narrow Trees,
Flag Poles

Accessories:
Reflector, Wall Mount

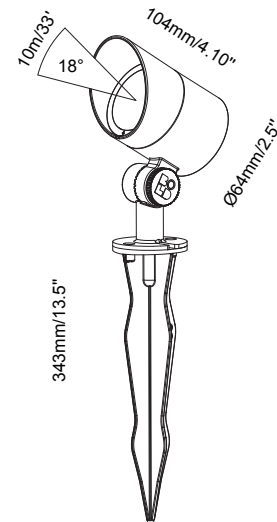

Max. Luminous intensity : 2839 cd

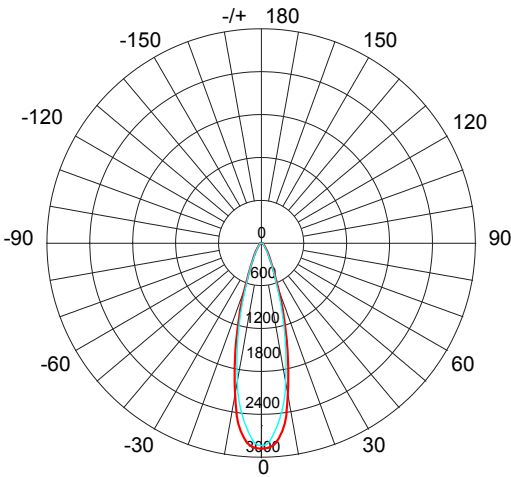

UNIT:cd
C0/180, 18.3

AVERAGE BEAM ANGLE (50%): 18.3DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
3.25	173.98/259.40		1.07
6.25	43.54/64.90		2.15
13	10.86/16.20		4.26
16.5	7.10/10.56		5.41
19.5	3.63/5.40		7.56
23	2.79/4.09		7.38
26.25	2.14/3.25		8.59
32.5	1.78/2.62		9.74
46	0.60/0.90		9.43