


# FEWLCSC42



Singlemode LC to SC, Fiber Patch Cord, 1.6 mm Duplex, Riser

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber patch cord, duplex
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications

Color, boot A	Blue
Color, boot B	Blue
Color, connector A	Blue
Color, connector B	Blue
Connector A, quantity	2
Connector B, quantity	2
Interface, Connector A	LC/UPC
Interface, Connector B	SC/UPC
Jacket Color	Yellow
Total Fibers, quantity	2


## Dimensions

Cable Assembly Length, minimum (ft)	2
Cable Assembly Length, maximum (ft)	325
Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	99

# FEWLCSC42

Diameter Over Jacket 1.6 mm | 0.063 in

## Ordering Tree

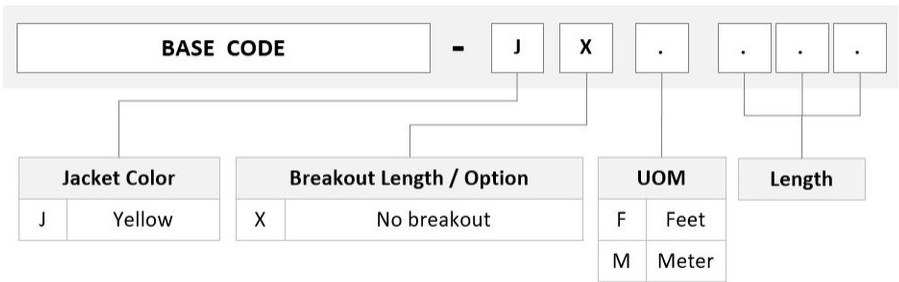

## Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

Fiber Mode Singlemode  
Fiber Type G.652.D | G.657.A1, TeraSPEED®

## Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)  
Environmental Space Riser

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant



## Included Products

760118588 – TeraSPEED® 1.6 mm Riser Zipcord Cable  
R-002-ZC-8W-F16BL

# FEWLCSC42

---

860637434

- TeraSPEED® Elite LC Connector for 1.6 mm Fiber, single-mode